# SRs and XFELs in Asia-Oceania

Tetsuya Ishikawa

RIKEN SPring-8 Center
Sayo, Hyogo 679-5148, Japan
*ishikawa@spring8.or.jp*

***12 July 2018@ BESAC_Rockville, MD, USA***

RIKEN

## SR Sources in Asia-Oceania

**Australia**
- Australian Synchrotron (Clayton)

**China**
- Beijing SR Facility (Beijing)
- Shanghai SR Facility (Shanghai)
- National SR Laboratory (Heifei)
- HEPS (Beijing)
- HALS (Heifei)
- Wuhan
- Xian
- Dongguan

**India**
- INDUS-II (Indore)
- Kolkata

**Japan**
- Photon Factory (Tsukuba)
- PF-AR (Tsukuba)
- UVSOR (Okazaki)
- AICHI SR (Seto)
- RITUMEI SRC (Kusatsu)
- SPring-8 (Harima)
- SPring-8-II (Harima)
- NEW SUBARU (Harima)
- HiSOR (Hiroshima)
- Kyushu SR (Tosu)
- SLiT-J (Sendai)

**Korea**
- PLS-II (Pohang)

**Singapore**
- SSLS

**Taiwan**
- TLS (Hsinchu)
- TPS (Hsinchu)

**Thailand**
- SPS (Nakhon Ratchasima)
- SPS-II

2nd generation,
3rd generation
In construction/planning

# Council Report 2018

**AOFSRR workshop 2018 @ Taipei International Convention Center**

**AOFSRR 2018 Council meeting @ Grand Hyatt Hotel Taipei**

# AOFSRR 2018 Council Members

## President

Andrew Peele
(Australia)

## Vice President

Shangjr Gwo
(Taiwan)

## Secretary General

Yoshihisa Harada

## Secretary Treasurer

Richard Garrett

## Representatives

Zhentang Zhao
(China)

Tapas Ganguli
(India)

Sarawut
Sujitjorn
(Thailand)

Mark Breese
(Singapore)

Nobuhiro
Kosugi
(Japan)

In Soo Ko
(Korea)

Don Smith
(New Zealand)

Open
(Malaysia)

Tran Duc Thiep
(Vietnam)

## Advisers

Keng Liang

Osamu Shimomura



Masaki Takata

# Australian Synchrotron – 2018 Progress

Australian Government

ansto

**The Australian Synchrotron operates 10 beamlines:**

> 99% beam availability; 5000 hours User Operations
> 6,500 registered users from over 80 research organisations
> 3,000 Students and Early Career Researchers
> 13% of users from international institutions
A wide range of Australian and international companies

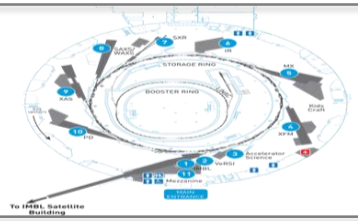

**New beamlines – part of the BRIGHT Program**

Micro Computed Tomography (MCT)* (*Commenced construction)
Medium Energy XAS (MEX1 & MEX2 )*
Biological Small Angle X-ray Scattering (BioSAXS)*
Advanced Diffraction & Scattering (ADS1 & ADS2)
High Performance MX (MX3)
X-ray Fluorescence Nanoprobe (Nanoprobe)
Micro Materials Characterisation (MMC)

**Excellent Scientific Output from 2017**

512 journal articles
20% of articles in high impact journals (IF > 7)
5177 researcher visits
~1000 experiments
< 30 unplanned downtimes



**Beamline and Capability Developments**

- ASCI High Performance Computing Cluster
  - MX structure solution; CT reconstruction & rendering; XFM analysis,…
- MX2 detector (EIGER 16M); MX1/MX2 sample robot upgrades
  - Average cycle time reduced from several minutes to ~35 s.
- XFM fast scanning stages; Maia detector upgrade; Eiger X 1M
  - Simultaneous Milliprobe & Microprobe operation; ptychography
- Toroidal Analyser ARPES
  - High-throughput NEXAFS
- IRM Focal Plane Array detector; Macro-ATR sample stages
  - Rapid, micron resolution IR maps of soft matter
- SAXS/WAXS endstation & detector upgrade; Co-Flow + SEC
  - High-throughput protein scattering, down to 0.005 mg/mL
- IMBL Large Animal & Patient Position Systems
  - Phase contrast in vivo imaging & CT; ~80 kg & ~1 m high
- PD robotic sample changing & auto-alignment; battery carousel
  - High-throughput protein scattering, down to 0.005 mg/mL

Chris Clarkson, *et al.*, *Nature*, **547**, 306 (2017).



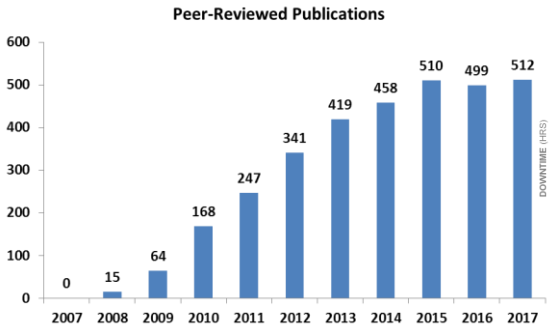


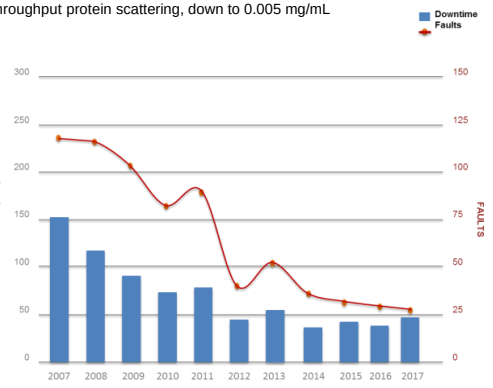

# NSRRC User Facilities

- Neutron Facility
  SIKA
- 台灣光子源
  (Taiwan Photon Source)
- 台灣光源
  (Taiwan Light Source)
- SPring-8
  Taiwan BLs

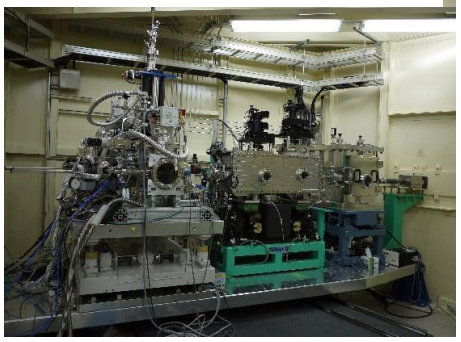

## *Accelerator-based Light Sources (still) in operation and to be constructed in Japan*

*MEXT* : *Academic to S&T*
*Government* : *Central to Local*
*Application* : *Basic to Applied*
*Users* : *Universities to Industries*

| | | | | |
|---|---|---|---|---|
| 1982 Photon Factory, IMSS, KEK | MEXT (Academic) | SX, HX | Top-up | to be upgraded again |
| 1983 UVSOR, IMS | MEXT (Academic) | UV, SX | Top-up | upgraded to UVSOR III in 2012 |
| 1987 PF-AR, IMSS, KEK | MEXT (Academic) | HX | Top-up | upgraded in 2002 |
| 1996 HiSOR, Hiroshima Univ. | MEXT (Academic) | UV, SX | | |
| 1996 Ritsumeikan SR | Ritsumeikan Univ. | UV, SX | | |
| 1997 SPring-8, RIKEN | MEXT (S&T) | HX | Top-up | to be upgraded to SPring-8 II |
| 1998 NewSUBARU | Hyogo Prefecture | UV, SX | (Top-up) | |
| 2006 SAGA Light Source | Saga Prefecture | SX, HX | | |
| 2012 SACLA (XFELs), RIKEN | MEXT (S&T) | HX | | |
| 2013 Aichi SR | Aichi Prefecture | SX, HX | Top-up | |
| 2023? SLiT-J (3GeV), QST | MEXT (S&T) + regional associations in Tohoku (industries, prefecture, city, universities) | SX, HX | Top-up | |

*We hope MEXT(S&T) will soon (before the end of this June) approve the partnership between QST and the Tohoku team!*

PAL-XFEL

# SSRF, SXFEL and SCLF (Shanghai)

- **A Soft X-ray FEL based on 1.5GeV C-band linac is under phased construction and commissioning**
- **A Hard X-ray FEL based on 8GeV SRF linac started its construction in April 2018**

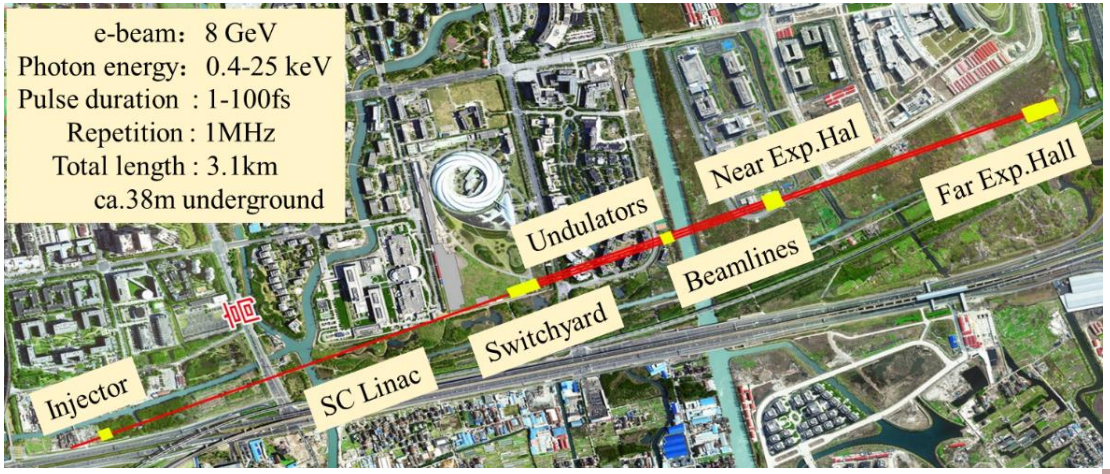


- **3.5GeV SR facility**
- **3.9nm·rad emmitance**
- **432m storage ring**

SSRF Phase-II Beamline
Project with 16 new beamlines started in 2016 and will last for 6 years.

# HEPS (Beijing)

- 6GeV SR facility
- 0.06nm·rad emittance
- 1360m storage ring

- A R&D project (HEPS-TF) with 50MUSD started in 2016.
- The project of HEPS has been approved by central government.
- Construction will start by end of 2018, and its commissioning is expected in 2024.

# HALS (Hefei)

2.4GeV SR facility
0.03nm·rad emittance
672m storage ring

- A R&D Project for HALS was launched with 50M USD in December 2017.
- This project will be listed in the national big scientific infrastructure plan from 2021 to 2025.
- Its construction is expected to start in 2021.

# Synchrotron Light Research Institute

**1. Infrastructure**

- Number of beamlines: **10** (operations) and **1** (under construction)
- New beamline for XAS using 3.5 T SMPW (designed and constructed by NSRRC) will be in operation in 2019.
- Full injection for storage ring is in operation.

**2. Statistics**

- Number of proposal nearly **400** in 2017 and more than 450 in 2018
- Number of publications more than **150 papers** in 2017.
- Number of International users is about 10% (**40 proposals**)

**3. Other activities**

- An ASEAN network 'ASEAN Large Nuclear and Synchrotron facilities Network (LNSN) has been established.
- Collaboration with other synchrotrons (NSRRC, AS, Diamond, etc.)

**4. Plan**

- Proposal for the 3rd generation synchrotron facility will be submitted in 2018.

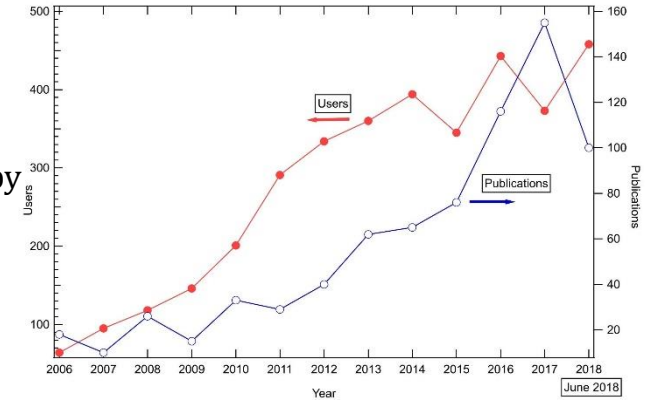


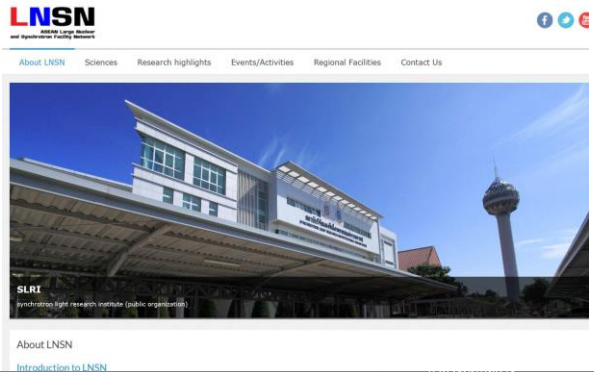


| SPS-II parameters | |
|---|---|
| Store beam energy | 3.0 GeV |
| Beam current | 300 mA |
| Emittance | 0.97 nm-rad |
| Lattice structure | DTBA |
| Superperiods | 14 |
| Circumference | 321.3 m |
| Long straight section length | 5.02 m x 14 |
| Short straight section length | 3.10 m x 14 |

# Concluding Remarks

## SR Sources

- An MBA upgrade is planned for SPring-8
- Greenfield construction for MBA is underway at many facilities:
  - SLiT-J (Japan), HEPS (China), HALS (China), Wuhan (China), Xian (China), Dongguan (China), SPS-II (Thailand), Kolkata (India)
  - Japanese SLiT-J relies on funding from industry; Chinese facilities are funded partly by local governments.

## XFELs

- 3 RT linac-based XFELs (SACLA, PAL-XFEL, SXFEL). An SC linac-based XFEL is planned in Shanghai (SCLF).
- Japan is exploring the possibility of making a 10 kHz machine using RT technology

# RT Linac may Reach 10 kHz Repetition Rate

PHYSICAL REVIEW ACCELERATORS AND BEAMS **19,** 011302 (2016)

## Dielectric assist accelerating structure

D. Satoh,[1,*] M. Yoshida,[2] and N. Hayashizaki[3]

[1]*Graduate School of Science and Engineering, Tokyo Institute of Technology, Meguro, Tokyo 152-8550, Japan*

[2]*High Energy Accelerator Research Organization KEK, 1-1 Oho, Tsukuba, Ibaraki 305-0801, Japan*

[3]*Research Laboratory for Nuclear Reactors, Tokyo Institute of Technology, Meguro, Tokyo 152-8550, Japan*

(Received 7 October 2015; published 25 January 2016)
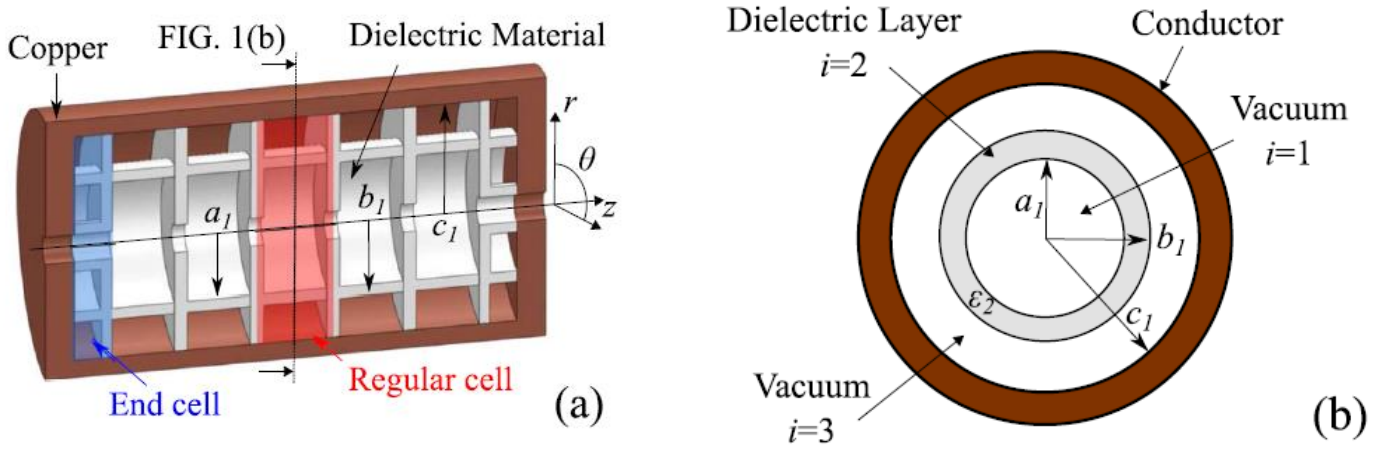
A higher-order $TM_{02n}$ mode accelerating structure is proposed based on a novel concept of dielectric loaded rf cavities. This accelerating structure consists of ultralow-loss dielectric cylinders and disks with irises which are periodically arranged in a metallic enclosure. Unlike conventional dielectric loaded accelerating structures, most of the rf power is stored in the vacuum space near the beam axis, leading to a significant reduction of the wall loss, much lower than that of conventional normal-conducting linac structures. This allows us to realize an extremely high quality factor and a very high shunt impedance at room temperature. A simulation of a 5 cell prototype design with an existing alumina ceramic indicates an unloaded quality factor of the accelerating mode over 120 000 and a shunt impedance exceeding 650 MΩ/m at room temperature.