

Summaries of FY 1993 Engineering Research

September 1993



U.S. Department of Energy

**Office of Energy Research
Office of Basic Energy Sciences
Division of Engineering and Geosciences**

This report has been reproduced directly from the best available copy.

Available to DOE and DOE contractors from the Office of Scientific and Technical Information, P.O. Box 62, Oak Ridge, TN 37831; prices available from (615) 576-8401.

Available to the public from the National Technical Information Service, U.S. Department of Commerce, 5285 Port Royal Rd., Springfield, VA 22161.



Printed with soy ink on recycled paper

Summaries of FY 1993 Engineering Research

September 1993



U.S. Department of Energy


**Office of Energy Research
Office of Basic Energy Sciences
Division of Engineering and Geosciences
Washington, DC 20585**

Foreword

This report documents the BES Engineering Research Program for fiscal year 1993; it provides a summary for each of the program projects in addition to a brief program overview. The report is intended to provide staff of Congressional committees, other executive departments, and other DOE offices with substantive program information so as to facilitate governmental overview and coordination of Federal research programs. Of equal importance, its availability facilitates communication of program information to interested research engineers and scientists. The organizational chart for the DOE Office of Energy Research (OER) on the next page delineates the six Divisions within the OER Office of Basic Energy Sciences (BES). Each BES Division administers basic, mission oriented research programs in the area indicated by its title. The BES Engineering Research Program is one such program; it is administered by the Engineering and Geosciences Division of BES. Dr. Oscar P. Manley is technical manager of the Engineering Research Program; inquiries concerning the program may be addressed to him, in writing or by phone at (301) 903-5822.

In preparing this report we asked the principal investigators to submit summaries for their projects that were specifically applicable to fiscal year 1993. The summaries received have been edited if necessary, but the press for timely publication made it impractical to have the investigators review and approve the summaries prior to publication. For more information about a given project, it is suggested that the investigators be contacted directly.

ENGINEERING RESEARCH PROGRAM WITHIN DOE

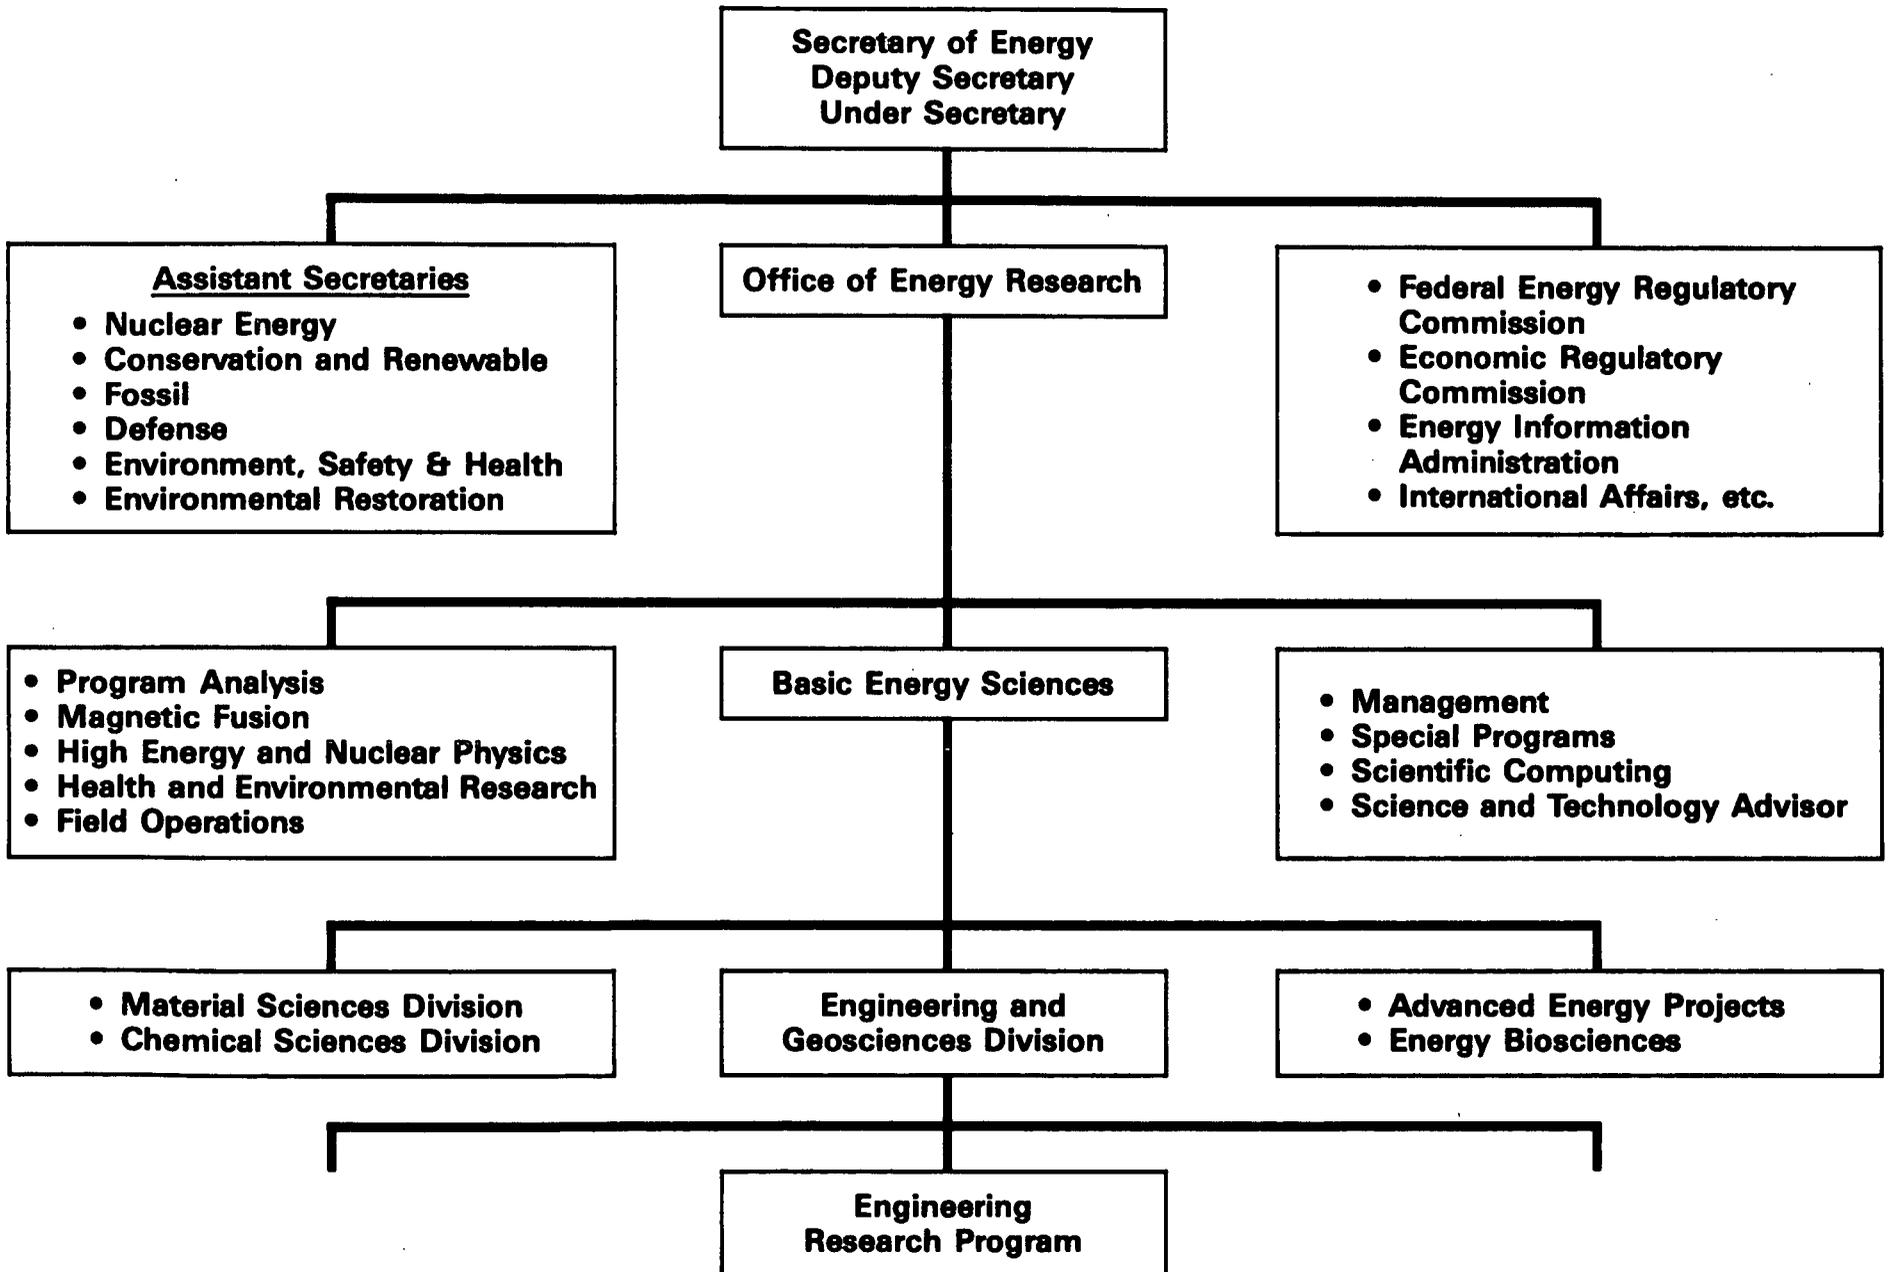

Introduction

The individual project summaries follow the program overview. The summaries are ordered alphabetically by name of institution and so the table of contents lists all the institutions at which projects were sponsored in fiscal year 1993.

The projects are numbered sequentially for individual identification in the indexes. Each project entry begins with an institutional-departmental heading. The names of investigators are listed immediately below the title. The funding level for fiscal year 1993 appears to the right of title; it is followed by the budget activity number (e.g., 01-A). These numbers categorize the projects for budgetary purposes and the categories are described in the budget number index. The fiscal year in which either the project began or was renewed and the anticipated duration in years are indicated respectively by the first two and last digits of the sequence directly below the budget activity number (e.g., 90-3). The summary description of the project completes the entry.

Program Review

BES Engineering Research

The BES Engineering Research Program is one of the component research programs which collectively constitute the DOE Basic Energy Sciences Program. The DOE Basic Energy Sciences program supports energy related research in the physical and biological sciences, and in engineering. The chief purpose of the DOE Basic Energy Sciences Program is to provide the fundamental scientific base on which identification and development of future, national energy options will depend. The major product of the program becomes part of the body of data and knowledge upon which the applied energy technologies are founded; the product is knowledge relevant to energy exploration, production, conversion and use.

The BES Engineering Research Program was started in 1979 to help resolve the numerous serious engineering issues arising from efforts to meet U.S. energy needs. The program supports fundamental research on broad, generic topics in energy related engineering topics not as narrowly scoped as those addressed by the shorter term engineering research projects sponsored by the various DOE technology programs. Special emphasis is placed on projects which, if successfully concluded, will benefit more than one energy technology. During the first year several workshops were sponsored for the purpose of identifying energy related engineering research needs and initial priorities. Representatives from industry, academic institutions, national laboratories, and leading members of professional organizations (Engineering Societies Commission of Energy, American Society of Mechanical Engineers, Society of Automotive Engineers, and Joint Automation and Control Committee) participated in the workshops. In addition to the participants in the workshops, staff representatives from the DOE technology programs and other leading U.S. energy engineering experts made significant contributions to the setting of program priorities. There resulted from this process a strong confirmation of the need for a long range, fundamental engineering research program with two major goals. The broad goals that were established by this process for the BES Engineering Research Program are:

- 1) To extend the body of knowledge underlying current engineering practice so as to create new options for enhancing energy savings and production, for prolonging useful equipment life, and for reducing costs without degradation of industrial production and performance quality; and
- 2) To broaden the technical and conceptual base for solving future engineering problems in the energy technologies.

In this process, it was further established that to achieve these goals, the BES Engineering Research Program should address the following topics identified as essential to the progress of many energy technologies:

- 1) **Advanced Industrial Technology:** improvement of energy conversion and utilization, opening new technological possibilities, and improvement of energy systems.
- 2) **Fluid Dynamics and Thermal Processes:** broadening of understanding of heat transfer in nonsteady flows, methodology for reducing vibrations and noise in heat exchangers, and engineering aspects of combustion.
- 3) **Solid Mechanics:** continuum mechanics, fracture mechanics, thermomechanical behavior in severe environments, aging & lifetime reliability of structures.
- 4) **Dynamics and Control of Processes and Systems:** development and use of information describing system behavior (system models), performance criteria, and theories of control optimization to achieve the best possible system performance subject to known constraints.

A Scoping Workshop held in December, 1985 confirmed the continued needs for research in these topical areas. Because of budgetary limitations, the implemented BES Engineering Research Program is somewhat less broad than the program envisioned above. At present, equal emphasis is being placed in three carefully selected, high priority research areas; namely,

- 1) **Mechanical Sciences** including fluid mechanics (multiphase flow and turbulence) heat transfer, and solid mechanics (continuum mechanics and fracture mechanics).
- 2) **System Sciences** including process control and instrumentation.
- 3) **Engineering Analysis** including nonlinear dynamics, data bases for thermophysical properties of fluids, modeling of combustion processes for engineering application, and foundations of bioprocessing of fuels and energy related wastes.

These areas contain the most critical elements of the four topics enumerated above; as such they are of importance to energy technologies both in the short and long term, and therefore of immediate programmatic interest. It should be noted that other areas of basic research important to engineering are monitored elsewhere in BES. For instance, separation sciences and research on thermophysical properties are among the responsibilities of the Chemical Sciences Division, while microscopic aspects of fracture mechanics are in the domain of the Material Sciences Division. As resources permit, other high priority areas are being added to the Engineering Research Program. Thus, as a result of previous growth in the program budget an important development took place in the Engineering Research Program: two major concentrations of research were initiated.

First, a new program was organized at Oak Ridge National Lab dealing with intelligent machines in an unstructured environment. Some resources are available for coordinated, more narrowly focussed, related, high quality research at universities and other research centers. All such activities are supported and administered directly by the Engineering Research Program, but some coordination of efforts with the ORNL program may prove useful.

Secondly in FY 1985, a collaborative research effort was started between MIT and Idaho National Engineering Lab. At present, the collaboration is in three distinct areas: Plasma Process Engineering, Automated Welding, and Fracture Mechanics. Collateral, high quality research efforts at other institutions are supported by the Engineering Research Program.

In the expectation of a future modest growth of this Program, two International Workshops on Two Phase Flow Fundamental were held one in September 1985 and the other in March, 1987. The meetings were used to identify basic research needs in the field of two phase flow and heat transfer; summary reports of the workshops are available from the Program Office. The proceedings of the two workshops have been published as volumes in the series "Advances in Heat and Mass Transfer" (Hemisphere Publishing Company). A third international workshop held in June 1992 surveyed the status of the field. The proceedings will be published by CRC Publishing Company.

Two additional workshops were held during 1988. The first dealt with possible research opportunities in the field of novel devices using the new high temperature superconductors. The second addressed research needs for bioprocessing of fuels and energy related wastes. Reports of both workshops have been published. Additional funds have been provided in FY 1992 to initiate research in the above mentioned bioprocessing area. Of interest are relevant studies at the intersection of biology, biochemistry, and chemical engineering.


Another workshop aimed at identifying research opportunities to mitigate the effects of aging in energy production and distribution systems took place in October 1992. The proceedings have appeared in Applied Mechanics Reviews.

It should be mentioned too, that some very limited support is available for research on large scale systems. A report of a workshop on needs, opportunities, and options in this field is available from Professor G.L. Thompson, Graduate School of Industrial Administration, Carnegie-Mellon University, Pittsburgh, PA 15213. Also there is some interest in addressing the basic foundations of advanced manufacturing processes. In this context 24 three-year doctoral fellowships administered by National Academy of Science and National Research Council have been sponsored.

Research projects sponsored by the BES Engineering Research Program are currently underway at universities, private sector laboratories, and DOE national laboratories. In fiscal year 1993 the available program operating funds available amounted to about \$16.2 million. The distribution of these funds among various institutions and by topical area is

illustrated on the next page. Project funding levels are mostly in the range of \$50,000 to \$150,000 per year. Typical duration of a project is three to four years, with some projects expected to last as long as ten years or more. The BES Engineering Research projects stem almost without exception from grant applications. Applications which anticipate definite results in less than two years are usually referred to the appropriate DOE technology program for consideration. All those interested in submitting a proposal are encouraged to discuss their ideas with the technical program manager prior to submission of a formal proposal. Such discussion helps to establish whether or not a potential project has a reasonable chance of being funded. The primary considerations for possible support are the technical quality of the proposal and the professional standing of the principal investigators and staff. An effort is made to attract first rate, younger research engineers and energy oriented applied scientists. A high technical caliber of research is maintained by requiring that the projects supported have potential for a significant contribution to energy related engineering science, or for an initial contribution to a new energy relevant technology. Sponsored projects are selected primarily for their relevance to DOE mission requirements; the contribution to energy related graduate education is an important consideration. Thus projects sponsored at universities are essentially limited to advanced theoretical and experimental studies usually performed by faculty members, staff research scientists, and doctoral candidates.

**ENGINEERING RESEARCH PROGRAM
FY '93 BUDGET (\$000's)
BY INSTITUTIONAL TYPE**

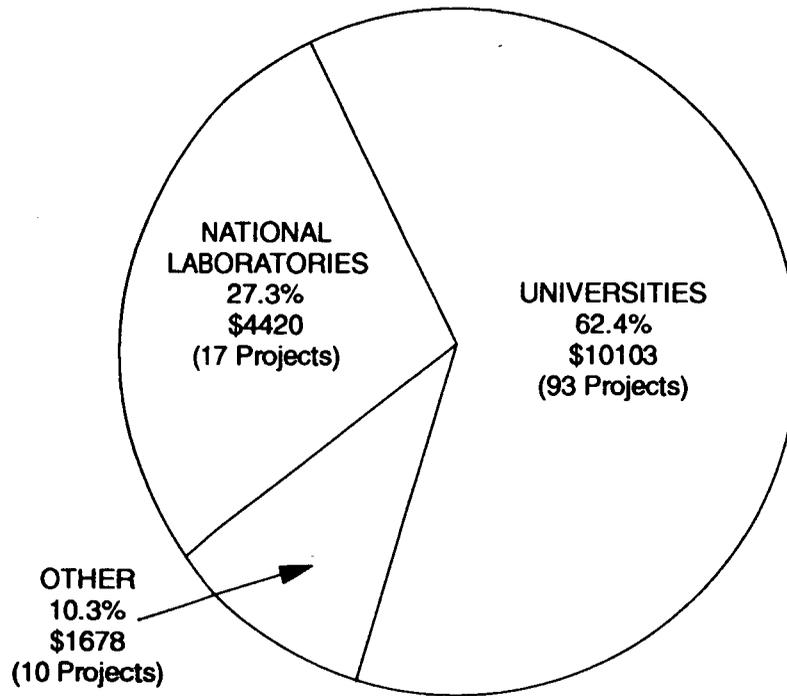

**ENGINEERING RESEARCH PROGRAM
FY '93 BUDGET
BY TECHNICAL AREAS**

	<u>(\$000's)</u>	<u>%</u>	<u>NUMBER OF PROJECTS</u>
MECHANICAL SCIENCES	5329	32.9	51
SYSTEMS SCIENCES	4573	28.2	22
ENGINEERING ANALYSIS	6300	38.9	47

Table of Contents

University of Alabama	1
Argonne National Laboratory	1
University of Arizona	2
Arizona State University	3
Battelle Memorial Institute	3
University Of California, Berkeley	4
University Of California, Los Angeles	5
University Of California, San Diego	6
University Of California, Santa Barbara	9
California Institute Of Technology	10
Carnegie Mellon University	10
University Of Chicago	12
Clarkson University	13
University Of Connecticut	13
Cornell University	14
Dartmouth College	15
Duke University	16
Engineering Science Software, Inc.	13
Idaho National Engineering Laboratory	16
University Of Illinois	19
University Of Illinois At Chicago	20
Johns Hopkins University	21
Robert H. Kraichnan, Inc.	21
Lawrence Berkeley Laboratory	22
Lovelace Medical Foundation	22
University Of Maryland	22
University Of Massachusetts	25
University Of Massachusetts-Lowell	25
Massachusetts Institute Of Technology	26
University Of Minnesota	29
National Academy of Sciences/National Research Council	30
National Center for Manufacturing Sciences	31
National Institute Of Standards And Technology	31
The City University Of New York, The City College	32
Northwestern University	33
University Of Notre Dame	35
Oak Ridge National Laboratory	36
Ohio State University	36
Oregon State University	37

Table of Contents (continued)

Pacific Northwest Laboratory	38
University Of Pennsylvania	38
Pennsylvania State University	39
Physical Sciences Inc.	39
Princeton University	40
Purdue University	41
Rensselaer Polytechnic Institute	42
Rice University	43
University Of Rochester	44
Rockefeller University	45
Sandia National Laboratories	45
University Of Southern California	46
Southwest Research Institute	47
Stanford University	48
Stevens Institute Of Technology	51
Texas A&M University	52
University Of Texas At Austin	52
Tufts University	53
United Technologies Research Center	53
Washington University	54
Washington State University	54
University Of Wisconsin	55

University Of Alabama

Dept of Mathematics
Tuscaloosa, AL 35487

\$54,123
01-C
91-3

Hydrodynamic Instabilities and Coherent Structures

A. Frenkel

The objective of this research is to further the fundamental understanding of stability properties of several far-from-equilibrium fluid systems which are relevant to energy engineering sciences. In particular, flows periodic in space and possibly in time are studied as models to gain insights into such turbulence phenomena as large-scale coherent structures, eddy viscosity, and the inverse cascade of energy. Film flows - such as core-annular ones - are important to, e.g., lubricated pipelining of viscous oils. The large-scale evolution equations for the different systems may exhibit common features, such as pattern formation and coherent structures. Secondary instabilities of nonlinear waves in liquid films can be studied with methods developed for periodic flows.

Some of the results are as follows: A rigorous iterative method was found for the problems of periodic-flow stability. The possibility of negative isotropic eddy viscosity was demonstrated, resolving a rather long-outstanding question.

For film flows, a perturbative method capable of yielding both the evolution descriptions and the parametric conditions of their validity was suggested. A highly nonlinear evolution equation for large-amplitude regimes of a wavy flow was obtained. Its numerical simulations yielded an excellent agreement with experiments. In addition, it revealed interacting coherent structures with rich and unique dynamics.

Some fundamental questions concerning commonly used perturbative approaches were clarified. Certain deficiencies of well-known evolution equations were pointed out.

Argonne National Laboratory

Energy Technology Division
Argonne, IL 60439

\$134,000
01-A
90-3

Chaos in Fluid-Structure Systems

S. Chen

Energy systems have had a history of dynamic structural instabilities caused by fluid flow resulting in costly component repair and replacement and loss of energy production. Integrated theoretical and experimental studies are being performed to enhance the understanding of nonlinear oscillations and dynamic instability phenomena involving both fluids and solid structures and their coupling. The objectives are to contribute to the explanation of observed phenomena, providing insights into chaotic characteristics of such coupled mechanical systems and ultimately, to the solution of engineering design problems. This is a cooperative research program with Professor F. Moon at Cornell University.

Fluidelastic instability of loosely supported tubes, vibrating in a tube support plate-inactive mode, is suspected to be one of the main causes of tube failure in some operating steam generators and heat exchangers. As a vehicle to understand the nonlinear behavior of fluid-structure systems, fluidelastic instability of loosely supported tube arrays in crossflow is being studied in detail. A series of tube arrays with a motion-limiting stop configuration are being tested to investigate various response characteristics and a mathematical model based on the unsteady flow theory has been developed to predict the response characteristics of this classical fluid-structure system. Other fluid-structure systems, such as coupled stack/wire dynamics due to wind excitations, are also being investigated. Analytical results and experimental data agree fairly well.

Tests and analysis of tube arrays are being continued. One of the key elements is the motion-dependent fluid forces which will be measured using the existing water channel with an emphasis on the nonlinear behavior. Specific topics to be addressed include interaction between flow field and oscillating structures, mathematical models and instability mechanisms, and intelligent control of fluid/structure systems. Experimental efforts are focused on characterizing and controlling chaos and validating analytical models.

of high-power laser components and for a better control of short-pulse laser microfabrication as well as short-pulse laser diagnostics.

University Of California/LA

Mech, Aero & Nuclear Eng Dept \$90,024
School of Eng & Applied Science 01-C
Los Angeles, CA 90024-1597 92-3

Basic Studies of Transport Processes in Porous Media

I. Catton, V. Travkin, L. Gratton

The research seeks to develop the methods necessary to model turbulent transport processes for both single- and two-phase flows in highly porous media. Emphasis is placed upon the development and theoretical study of integro-differential transport equations, with special attention given to morphological factors. Research has focused upon (1) single-phase, two-temperature turbulent transport in porous media, and (2) turbulent transport of momentum and energy in a channel with regular rough walls.

Dependence of the Darcy and quadratic terms upon the convective and diffusion terms' assumed version has been shown, as has the connection between the diffusion and drag resistance terms in the flow equations. The closure models allowed associations between bulk process experimental correlations and the current simulation representations to be exploited in the numerical procedures. Subsequent numerical investigations displayed the equations' sensitivity to the assumed morphology and the transport coefficients' descriptive ability for high solid/fluid phase thermal diffusivity ratios and high void fractions.

Two-dimensional capillary patterns and spherical structures were analyzed using an irregular four-coordinate lattice with varying bond orientations and random lattice patterns. Prescription of the medium's statistical structure allowed transformation of the integro-differential transport equations into differential equations with probability density functions governing the spatially varying stochastic coefficients and source terms. Combination of space averaging and random morphology process theories resulted in realistic explanation of processes in porous media.

University Of California/LA

Mech, Aero & Nuclear Eng Dept \$112,850
School of Eng & Applied Science 06-C
Los Angeles, CA 90024 93-3

Linear Kinetic Theory and Particle Transport in Stochastic Mixtures *G. Pomraning*

The goal in this research is to develop a comprehensive theory of linear transport/kinetic theory in a stochastic mixture of solids and immiscible fluids. Such a theory should predict the ensemble average and higher moments, such as the variance, of the particle or energy density described by the underlying transport/kinetic equation. The statistics to be studied correspond to N-state discrete random variables for the interaction coefficients and sources, with N denoting the number of components in the mixture. The mixing statistics to be considered are Markovian as well as more general statistics.

In the absence of time dependence and scattering, the theory is well developed and described by the master (Liouville) equation for Markovian mixing, and by renewal equations for non-Markovian mixing. The intent of further work is to generalize these treatments to include both time dependence and scattering. A further goal of this research is to develop approximate, but simpler, models from the comprehensive theory. In particular, a specific goal is to formulate a renormalized transport/kinetic theory of the usual nonstochastic form, but with effective interaction coefficients and sources to account for the stochastic nature of the problem. Numerical comparisons of all models will be made against Monte Carlo simulations which involve a straightforward average of solutions for a large number of physical realizations of the statistical mixing. Contact will also be made with experimental simulations of cloud-radiation interactions currently underway at another institution as part of DOE's global climate modeling initiative.

University Of California/LA

Physics Dept \$79,000
Los Angeles, CA 90024 06-C
93-3

Nonlinear Waves in Continuous Media *S. Putterman*

Nonlinear wave interactions in far off equilibrium fluids are being studied with the goal of understanding the interplay between processes that, concentrate energy (e.g. sonoluminescence), randomize energy (e.g. wave turbulence) and form localized states (e.g. solitons). The experimental discovery that strong sound waves generate picosecond flashes of light is now being studied from the theoretical perspective with the goal of understanding how energy can focus by twelve orders of magnitude. Turbulence in nonlinear waves is being studied from both the theoretical and experimental directions. Goals include the development of a Fokker-Planck theory that includes intermittency as well as the observation of collective modes in turbulence that are analogous to second sound. High amplitude waves can also form self-localized states such as the breather and kink solitons, and domain walls which have recently been observed. Current efforts are aimed at extending these findings to systems which are two and three dimensional. This work proceeds from the experimental, analytical and simulational avenues of approach.

University of California/SD

Scripps Inst of Oceanography \$165,000
La Jolla, CA 92093-0402 06-C
90-4

Nonperiodic, Broadband Signals: Signal Processing in Chaos *H. Abarbanel*

The analysis of chaotic signals observed in measurements on physical systems is of importance in energy problems ranging from fluidized bed flows in fossil energy applications to determination of the natural climate variability to the uncovering of simple models for complex behavior in fluid flows. This research has developed tools for this analysis which allows one to reconstruct the multivariate state space of a system from observations, time lagged, of a single dynamical variable. The time delay, the dimension, and properties of the strange attractor can all be determined from this data. The concept

of unfolding the attractor using the method of global false nearest neighbors and then determining locally the number of dynamical degrees of freedom using the local version of this has brought to the study of complex behavior a robustness which allows it to be used in engineering analysis and design. The algorithms developed for this purpose have also been used in a variety of applications requiring the separation of a chaotic signal from another information bearing signal or 'noise'. The tool kit of these algorithms is being ported to a common interface for use in the energy related sciences.

University Of California/SD

Dept of App Mech & Eng Sci \$126,000
La Jolla, CA 92093 06-B
93-3

Fundamental Studies of Spray Combustion *P. Libby, F. Williams*

This research involves a combined experimental and theoretical effort related to the behavior of fuel droplets in well defined but nonuniform flows. Our current research concerns fuel sprays in opposed and impinging streams which result in flat flames. A test rig which permits a wide variety of investigations including nonpremixed, premixed and partially premixed systems in opposed and impinging flows has been put into operation. By installing an appropriate grid in one or both ducts sprays in turbulent streams can be studied. Initial results involve the structure and extinction characteristics of laminar flames using a phase doppler particle analyzer which permits measurement of two velocity components, droplet diameter and number density. Several publications on this research have appeared. One interesting observation from these laminar studies is that under some flow conditions larger droplets from the spray pass through the stagnation plane into the opposing gas stream and oscillate about that plane. This phenomenon has been studied experimentally in terms of single droplets and in sprays. Related theoretical studies identify the parameters of droplet and flow determining whether or not oscillations occur. An interesting manifestation of such oscillations in sprays is that the probability density of the axial velocity of droplets on the axis of the flow at points above the stagnation plane can be bimodal with both positive and negative velocities. A theoretical treatment of this phenomenon is underway. Initial experiments

on a turbulent spray impinging on a wall without combustion with the aim of determining the relative velocity between gas and droplets of various sizes has been completed. Data analysis and interpretation are underway.

University Of California/SD

Department of Chemistry, 0340 \$183,512
La Jolla, CA 92093 06-C
92-4

Noisy Nonlinear Systems K. Lindenberg

The broad objective of this project is to investigate the interplay of nonlinear deterministic dynamics with spatial and temporal fluctuations.

Density fluctuations in binary reaction--diffusion processes in low dimensional systems lead to spatial and temporal anomalies. The asymptotic behavior is well established, but sets in only after extremely long times. The hierarchy of kinetic regimes for all times has now been determined under a variety of conditions. This work continues with a broader set of reactions and geometries.

Transport on certain quasi-random fractals has been determined analytically. One aim is to extend the approach to more complex fractals. Another is to investigate transport on structures that in one extreme parameter regime are Euclidean but in another are fractal. This is done by replacing holes or disallowed pathways on fractals with appropriate barriers. At short times a walk on such a structure is indistinguishable from that on the associated fractal; at long times it should appear Euclidean. The crossover time should be determined by a tunable parameter such as the temperature. Preliminary results have been obtained.

Systems subject to deterministic and/or stochastic forces exhibit interesting behavior caused by the interplay of nonlinearity, noise and deterministic forces. A path integral approach has been successful for the analysis of the response of nonlinear systems to colored noise; developments in this area continue. A difference equation approach has provided the response of a linear system to a coin-toss square wave, leading to unexpected non-monotonic response. The response of nonlinear systems to combinations of deterministic and stochastic forces is under investigation.

University Of California/SD

Department of Mathematics \$98,000
La Jolla, CA 92093 06-C
93-1

Knot Invariants and the Thermodynamics of Lattice Gas Automata D. Meyer

Some discrete models for dynamical systems (like lattice gas hydrodynamics) exhibit approximately thermodynamic behavior despite the presence of conserved quantities other than the energy/momenta and even for small system size (e.g., the lattice gas models for two phase flow through porous media). The goal of this project is to build on the understanding of the connections between knot invariants, exactly solvable statistical mechanics models and discrete dynamical systems gained in earlier work (appearing in *Physica D* and *Knots 90*) toward an answer to the question of how this early and robust thermodynamic behavior occurs in lattice gas automata.

The basis of the approach is exemplified by the result that one specific reversible cellular automaton model with a conserved quantity is equivalent, in the sense that the ensemble of 1 + 1 dimensional spacetime evolutions is the same as the equilibrium ensemble of 2 dimensional configurations, to a solvable statistical mechanics model at a critical point. In addition to the association between the critical limit of solvable models and knot invariants, the physical characteristics of the critical point are consistent with the canonical distribution observed in simulations.

Current work includes the application of this approach to a family of 1 dimensional lattice gas automata based on a model of 't Hooft. The intention is also to study the relation between the lattice gas analysis of this model and 't Hooft's defect/curvature interpretation. Recent developments (Vassiliev knot invariants) are expected to lead to a better understanding of the connection between the usual perturbative analysis and global topological properties of these nonlinear systems. Investigation of higher dimensional models, *via* solutions of the tetrahedron equation, has also begun.

University Of California/SB

Dept of Physics
Santa Barbara, CA 93106

\$264,290
06-C
93-5

**Bifurcations and Patterns in Nonlinear
Dissipative Systems**
G. Ahlers, D. Cannell

This project consists of experimental investigations of heat transport, pattern formation, and bifurcation phenomena in non-linear non-equilibrium fluid-mechanical systems. These issues are studied in Rayleigh-Benard convection, using both pure and multicomponent fluids. They are of fundamental scientific interest, but also play an important role in engineering, materials science, ecology, meteorology, geophysics, and astrophysics. For instance, various forms of convection are important in such diverse phenomena as crystal growth from a melt with or without impurities, energy production in solar ponds, flow in the earth's mantle geo-thermal stratifications, and various oceanographic and atmospheric phenomena. Our work utilizes computer-enhanced shadowgraph imaging of flow patterns and high-resolution heat transport measurements.

We studied convection in a gas (CO_2) under pressure (about 30 bar) in a very large aspect ratio sample (radius/height = 150). Under non-Boussinesq conditions, the bifurcation from conduction to convection became hysteretic, and the initial pattern consisted of a perfect lattice containing more than 10^4 hexagonal cells. For parameter values where time-independent parallel straight rolls were theoretically predicted for a laterally infinite system, we found a state of spiral-defect chaos.

We investigated convection in a nematic liquid crystal in a horizontal magnetic field H . We found excellent agreement with recent theoretical predictions for the bifurcation line $R_c(H)$, and for the convection-roll orientations as a function of H . We also used this system to study convection when two phases (the nematic and isotropic phase) are present in the cell. Convection in the presence of a first-order phase change is relevant to convection in the earth's mantle; ours are the first quantitative experiments relevant to this important problem.



We have continued our work on binary-mixture convection. For positive separation ratios Ψ we studied square patterns. For negative Ψ , we investigated time formation of localized pulses in two dimensions.

University Of California/SB

Dept of Chemical & Nuc Eng \$106,300
Santa Barbara, CA 93106 01-C
91-3

**Turbulence Structure and Transport
Processes in Wavy Liquid Streams**
S. Banerjee, G. Hetsroni

Experiments have been completed to visualize wave turbulence interactions near shear-free gas-liquid interfaces. Mechanically generated waves of different lengths and amplitudes were imposed on the flow and the effects on the turbulence structure determined. It was found that the nearwall structure was affected by interfacial waves in the relatively shallow stream studied. In particular, the wall region was found to couple with waves in frequency ranges of about the same magnitude as bursts/ejections. A paper has been published in *Physics of Fluids* ("Wave-Turbulence Interactions in Free-Surface Channel Flows", M. Rashidi, G. Hetsroni and S. Banerjee, 1992).

In addition, work using laser Doppler anemometry has continued in parallel with flow visualization. It has been found that wall region coherent structures, which are normally thought of as streaks, burst/ejections and in-sweeps, as well as relatively short quasi-streamwise vortices, may actually be one funnel-shaped structure in which the fluid motion is initially in the form of relatively tight quasi-streamwise vortices, later on expanding to trace the surface of a funnel laid sideways in the flow. The phenomenon, to some extent, is reminiscent of vortex breakdown. Ejections and in-sweeps are then the rising and falling portions of fluid that trace the surface of the funnel. Work is continuing to establish whether these are in reality the determining structures in boundary layer flows and whether simple models can be constructed on their basis. To support these efforts, three-dimensional velocity fluctuations are being measured in conjunction with visualization of small oxygen microbubble tracers.



reconfigurable modular manipulator system, our goal is to not only create the technology but to push basic research for design of non redundant, redundant, and fault tolerant manipulators.

This basic research effort will address the problem of mapping tasks into a manipulator configuration, formulation of control algorithms for the mapped configuration, and experimental verification of the developed ideas. Though it is not the primary objective, we believe that building prototype experimental modules for demonstrating our ideas will also contribute to the technology of modular manipulators. For configuring a manipulator from task requirements, we have developed methodologies that map the task requirements into a specific non-redundant manipulator. The kinematic task requirements are used to determine the link lengths and the orientation of the modules. And the dynamic task requirements are translated to obtain the sizes and rating of the actuators or joints.

University Of Chicago

Dept of Chemistry
Chicago, IL 60637

\$ 0
06-C
92-1

Finite-Time Thermodynamics and Effective Energy Use S. Berry

The period 1992-93 was fruitful. The work followed two lines, the principal objectives of the current work. One is the development of methods of optimizing engines and processes by optimal control methods for distributed systems and averaged systems. The other is the development of a self-consistent thermo-hydro-mechanics for nonequilibrium systems. The two publications from the former illustrate that approach^{1,2}: the first continues our earlier work³ by applying constraints of finite-time operation and by developing a computational algorithm for cases with no analytic solutions. The second analyzes the internal combustion engine and exposes ways to improve its efficiency or power delivery, in some cases by heating the system rather than cooling it, for part of the cycle. This work is being continued with a postdoctoral, Vladimir Kazakov, and Professor Anatoly M. Tsirlin, visiting in Fall, 1993. Both are from the Institute for Optimization and Control Theory, Pereslavl-Zalessky, Russia.

The other line is also represented by two recent publications^{4,5}: the first overcomes the traditional limitation of neglect of the finite heat propagation rate and develops a finite-time formalism based on hyperbolic differential equations. The second develops a Lagrangian treatment in which canonical variables are introduced for nonequilibrium thermodynamics.

1. V. N. Orlov and R. S. Berry, "Analytical and numerical estimates of efficiency for an irreversible heat engine with distributed working fluid," *Phys. Rev. A* 45, 7202 (1992).

2. V. N. Orlov and R. S. Berry, "Power and efficiency limits for internal combustion engines via methods of finite-time thermodynamics," *J. Appl. Physics* (in press, 1993).

3. V. N. Orlov and R. S. Berry, "Power output from an irreversible heat engine with a nonuniform working fluid," *Phys. Rev. A* 45, 7230 (1990).

4. S. Sieniutycz and R. S. Berry, "Least-entropy generation: Variational principle of Onsager's type for transient hyperbolic heat and mass transfer," *Phys. Rev. A* 46, 6359 (1992).

5. S. Sieniutycz and R. S. Berry, "Canonical formalism, fundamental equation and generalized thermomechanics for irreversible fluids with heat transfer," *Phys. Rev. E* 47, 1765 (1993).

University Of Chicago

The Enrico Fermi Institute
Chicago, IL 60637

\$324,000
06-C
93-3

Fundamentals and Techniques of Nonimaging Optics R. Winston

Nonimaging optics departs from the methods of traditional optical design to develop instead techniques for maximizing the collecting power of concentrating elements and systems. Designs which exceed the concentration attainable with focusing techniques by factors of four or more and approach the theoretical limit are possible. This is accomplished by applying the concepts of Hamiltonian optics, phase space conservation, thermodynamic arguments, and radiative transfer

methods. In the early nonimaging designs the mighty edifice of aberration theory was dismantled and replaced by a single key idea. According to this, maximum concentration is achieved by ensuring that rays collected at the extreme angle for which the concentrator is designed are redirected, after at most one reflection, to form a caustic on the absorber. This principle proved sufficiently elastic to accommodate most boundary conditions in two dimensions (i.e., linear geometry). Ideal solutions in three dimensions have also been formulated. Our work on vector flux has led to a reexamination of the foundations of radiometry with emphasis on observable effects. Our theoretical work on nonimaging designs has led to demonstration of ultra-high flux from sunlight which exceeds previous results by substantial factors. Design algorithms have been developed for reflectors that are functionals of the desired irradiance. This permits new solutions which solve classical problems in illumination from extended sources.

Clarkson University

Dept of Chemical Engineering
Potsdam, NY 13676

\$62,000
01-C
91-3

Lift and Drag Forces on Droplets and Particles in Wall-Bounded Flows
J. McLaughlin

The goal of this research is to obtain quantitative information about the lift and drag forces that act on small droplets or particles that translate through shear flows. Such forces affect the motion of droplets or particles near a rigid wall. Thus, a knowledge of the forces is needed to describe processes such as the deposition of aerosols on solid surfaces.

The approach used in the research involves a combination of analytical, numerical, and laboratory work. Asymptotic expressions have been derived for the lift and drag forces in the regime of small Reynolds numbers. In most situations of practical importance, however, the droplet or particle Reynolds numbers are not small compared to unity. At finite Reynolds numbers, direct numerical simulations of the three-dimensional flow field around a sphere in a shear flow have provided the forces. The experiments involve measurements of particle migration velocities in a vertical homogeneous shear flow

apparatus. The results provide checks of the numerical and theoretical work.

The asymptotic and experimental portions of the project are done. The numerical study is still under way. The numerical results to date are in good agreement with the asymptotic and experimental findings when the particle Reynolds numbers are smaller than unity.

University Of Connecticut

Dept of Mechanical Engineering
Storrs, CT 06268

\$50,000
01-A
92-3

Engineering Science Software

Smithfield, RI 02917

\$48,000
01-A
92-3

A Micromechanical Viscoplastic Stress-Strain Model with Grain Boundary Sliding
E. Jordan, K. Walker

In the first part of the program a model that allowed polycrystalline elastic and viscoplastic constitutive behavior to be predicted from crystallographic slip in single crystals was developed and verified in high temperature biaxial polycrystal experiments.

In the ongoing research the goal is to predict the degree of heterogeneity of deformation and verify these predictions experimentally. Two types of theoretical models have been used to predict heterogeneity. The first model involves averaging the effect of neighboring grains while the second model using a unique Green's function method, allows arrays of grains to be modeled explicitly. Calculations done to date show that the self-consistent model significantly underestimates the heterogeneity compared to the more realistic explicit model. The most extreme heterogeneity found in studying 50,000 grains was not nearly as great as in a pair of artificially constructed arrays designed to produce extreme heterogeneity.

The strain in individual grains was recorded in a coarse grained sample using the Moire' interferometry apparatus at INEL. Reduction of this raw data to strain fields is now ongoing. Preliminary results show that the inelastic response is extremely heterogeneous. The modeling software is now being enhanced to

include constitutive model with an appropriate abrupt yield behavior to see if the observed extreme heterogeneity can be modeled. Neutron diffraction experiments are to commence on July 22, 1993 at Argonne National Labs. In these experiments elastic strains will be measured for both surface and interior grains. Thus data will nicely complement the Moire' data which reveals the total strain of surface grains only. Developing models to predict grain to grain heterogeneity and verifying these models is a basic element in modeling mechanical behavior. Such heterogeneity is important in fatigue which starts in the most unfavorably oriented grain, in modeling stress induced phase transformation and in grinding where heterogeneity may influence surface finish.

Cornell University

Mechanical & Aerospace Engineering \$62,988
Ithaca, NY 14853

01-A
91-3

Chaos in Fluid-Structure Systems *F. Moon*

Two principal experiments were carried out under this grant during the second year of this project:

i) Forced vibration of a single flexible tube with internal flow, ii) Cross flow measurements of chaotic vibrations of a flexible tube in a five tube row.

i) In the first set of experiments, begun in the first year, we explored multifractal phenomena, which describe the transition from quasiperiodic to chaotic vibrations. Quasiperiodic vibrations were observed in earlier experiments by Dr. G. Scott Copeland in flow through a long tube with an end mass. These results were reported on a Ph.D. dissertation in Summer 1990. By introducing a periodic-forcing of the tube in an adaptation of this experiment, we were able to more easily study this transition from quasiperiodic to chaotic vibration. This study was motivated by work in the mid 1980's on forced Rayleigh-Bernard flow which showed a linkage between quasiperiodic motion and the circle map.

In the forced tube experiment we were able to show a similar connection to the circle map, and in particular, the multifractal nature of the breakup of the torus in c phase space. A multifractal is a

distribution function which is described by a set of points with a continuous set of fractal dimensions. Our observations of multifractal behavior were, we believe, the first to be observed in fluid-structure vibrations.

In January 1992, Mr. George Muntean visited Argonne National Laboratory and reported to Dr. S.S. Chen our findings on multifractal measurements. He subsequently presented a paper at the DOE Grantees meeting later this past spring. A revised paper has been submitted to the Journal of Fluids and Structures, and is currently under review.

ii) The design of the cross-flow, tube row experiment began last summer and was completed this fall. These experiments parallel the work of Cai and Chen (1992). In the Cornell experiments the center tube of a five-tube set suspended on a flexible rod. The tube motion is limited by motions stops, thus introducing a strong nonlinearity in the tube stiffness. Preliminary experiments were carried out in water. The vibration amplitude versus flow velocity shows the instability onset (Hopf bifurcation) and the vibration saturation when the impact constraints limit the chaotic motion. This response was found to depend on whether the flow velocity was increasing or decreasing.

The vibration frequency was found to depend on the flow velocity. There is some evidence that the periodic motion at the onset of flutter to chaotic motion transition occurs through quasiperiodic vibration.

At the present time we are carrying out the calculations of the fractal nature of the Chaotic motion with the goal of establishing the low dimensional nature of the dynamics. At the same time we will correlate our findings with a similar experiment at Argonne National Laboratory to establish the validity of the fractal dimension technique in determining chaos in such flows. The next stage of this work will involve experiments in cross flow of air past a row of tubes as described in the next section on our proposed research for the third year of this project.

In 1993 a new wind tunnel facility has been constructed and we are investigating nonlinear dynamics of a tube row in cross flow.

Cornell University

Sibley School of Mech & Aero Eng \$105,818
Ithaca, NY 14853 01-C
91-3

Experiments in Turbulent Mixing Z. Warhaft

Our experimental studies of passive scalar mixing and transport in turbulent flows are motivated by a desire to understand better the fluid mechanics of chemical reactions, combustion and environmental pollution, all of which occur in turbulent background flows. Towards this end we are studying passive thermal dispersion in a jet, and mixing of temperature fluctuations in homogeneous grid generated turbulence.

The jet experiment, in which a fine circular heated wire is placed close to the jet exit and concentric with it, is an analogue of a heated line source in grid turbulence, a much studied subject. The motivation in both cases is to determine the rate at which a scalar contaminant mixes disperses when it is introduced at a scale much smaller than that of the velocity field. Our results show that in the jet, mixing is faster due to the shear and that by about 20 jet diameters downstream complete mixing has occurred. Examination of various quantities such as the probability density function (pdf) and conditional statistics provides insight into the dynamical details of the mixing process.

Our work on grid turbulence has concentrated on the behavior of temperature spectra and the scalar pdf. We have shown that the pdf, under certain circumstances, has tails much broader than would be expected from a Gaussian distribution and that the temperature spectra obey Obukhov-Corrsin-Kolmogorov scaling even at very low Peclet numbers and without local isotropy in the scalar field.

Dartmouth College

Thayer School of Engineering \$ 0
Hanover, NH 03755 06-C
91-2

Mixing and Settling in Continuous Metal Production H. Richter

In modern metallurgical processes metal is produced continuously and directly from ore in

single converters operated in horizontal mode using submerged gas injection into the liquid metal-slag bath. These reactors promise substantial fuel savings and much better control of pollutants than common practice. The injected gas must create sufficient turbulence to provide excellent gas-liquid contact in order to maximize heat and mass transfer in the bath, but this turbulence must be selectively localized to provide adequate phase separation zones of metal and slag between active turbulent zones.

Knowledge of liquid entrainment into the bubble plume created by submerged gas injection, and of liquids separation are of fundamental value in designing reactors, however these phenomena are also of generic interest to other processes, such as the current major DOE-AISI direct steelmaking process or severe accident analysis of nuclear reactors.

In this work mixing caused by submerged gas injection into a bath and subsequent phase separation of two immiscible liquids representing slag and metal are being studied experimentally and analytically. Novel instrumentation for local measurement of volume fractions of gas and liquids has been developed. First experimental results of liquid flow velocities induced by gas injection and volume fractions of gases and liquids in and around the gas plume as well as complementing numerical results are available.

Dartmouth College

Thayer School of Engineering
Hanover, NH 03755

\$120,600
01-C
92-3

Two-Phase Potential Flow *G. Wallis*

The objective is to develop theorems for two-phase potential flow analogous to those existing for single phase flow.

Using one function, the "exertia," which describes the external fluid inertia due to relative motion of suspended particles, it has been possible to derive the average stress tensor, kinetic energy, overall momentum flux tensor and equations of motion for uniform systems of particles and the effective Bernoulli equation for the fluid flowing through a stationary array of particles.

Recent developments include more general descriptions of the mean particle stresses and the averaged Bernoulli equation for the fluid when both phases have a general motion. Links have also been established between this approach and Guerst's variational methods including the derivation of equations of motion for each phase it being possible for the dispersed phase to be compressible. The equations of motion for each phase have also been expressed in terms of a mutual "interfacial pressure tensor" that is related to both the average stress in the dispersed phase and the net force on the continuous phase. This interfacial pressure tensor is also closely coupled to the Reynolds stresses in the continuous phase.

The exertia and added-mass coefficients have been computed for various geometrical arrangements of spheres, both in an infinite array and in tubes. Comparable measurements were made by measuring the natural frequency of oscillation of such arrays in water. Future experiments are planned in which more properties, such as pressure fluctuations, are measured.

Theoretical and experimental efforts are underway to obtain realistic interphase forces including the effects of viscosity and drag. Computations show that the effects of pressure gradient, added mass, phase change and drag do not add linearly except at low Reynolds numbers. This has implications for the transient response and stability of fluidized beds.

Duke University

Department of Physics
Durham, NC 27706

\$60,000
01-C
93-3

Experimental and Analytical Investigations of Flows in Porous Media *R. Behringer*

Research objectives for this project include the development and application of two novel techniques for studying flow in porous media. These techniques are: 1) magnetic Resonance Imaging (MRI), and 2) a novel shadowgraph technique, to be referred to as MST (Modified Shadowgraph Technique). The primary goals are

to use these techniques to characterize and understand convective flows in porous media, including pattern selection, secondary instabilities, and time dependence. MRI provides both local velocity and local fluid density information. MST provides pattern information easily and efficiently. Both techniques are fully operational. An important finding is that the geometric structure of the medium plays a fundamental role in pattern selection. Media constructed from periodic arrays of bars show a well defined transition to convection and sharply defined parallel convection rolls with orientation determined by the symmetry of the array. Media consisting of a random array of holes show disordered patterns and an imperfect bifurcation to convection. Numerical studies are underway to probe the role of media structure on the pattern. Studies where the median is constructed from semi-ordered and well ordered arrays of spheres show patterns near onset with more symmetry than the random-hole media but less symmetry than the periodic bar media.

Idaho National Engineering Lab

Bioprocess & Environ Assessment \$109,000
Idaho Falls, ID 83415

06-A
89-3

Three Phase System Modelling *G. Andrews*

The behavior of bubbles of gas in liquids containing surface-active solutes is critical to the performance of processes like floatation, fermentation, and gas/liquid reaction. These

without the appearance of ferric iron precipitates. The culture complexity will then be progressively increased by adding an acidophilic heterotrophic bacterium that consumes organic matter known to inhibit *Leptospirillum*, and a protozoa that feeds on the bacteria. Appropriate control rules will be developed and implemented at each step.

Idaho National Engineering Lab

Energy Res & Applications Dept \$232,000
Idaho Falls, ID 83415 06-A

90-3

Modeling of Thermal Plasma Processes

J. Ramshaw, C. Chang

Optimization of thermal plasma processing techniques requires a better understanding of the space- and time-resolved flow and temperature distributions in the plasma plume and of the interactions between the plasma and injected particles. The present research is directed toward the development of a comprehensive computational model capable of providing such information. The model is embodied in the LAVA computer code for two- or three-dimensional transient or steady state thermal plasma simulations. The plasma is represented as a multicomponent ideal gas governed by the compressible Navier-Stokes equations. Multicomponent diffusion is calculated by a self-consistent effective binary diffusion approximation, including a new formulation for ambipolar diffusion of charged species. Subgrid-scale and k-epsilon turbulence models are included. Dissociation, ionization, and plasma chemistry are treated by means of general explicit and implicit chemistry routines for treating slow, fast, and equilibrium chemical reactions. Discrete particles interacting with the plasma are represented by a stochastic particle model which allows for distributions in particle sizes, shapes, temperatures, etc. Departures from local thermodynamic equilibrium are accounted for by a two-temperature model which permits the electron and heavy-particle temperatures to differ. Nonequilibrium populations of excited levels are treated as separate chemical species, with collisional and radiative transitions between levels modeled as kinetic chemical rate processes. Applications of the model to date include realistic simulations of plasma jets and plasma spraying, and detailed studies of excitation nonequilibrium in plasma jets.

Idaho National Engineering Lab

Materials Technology Group \$430,000
Idaho Falls, ID 83415-2218 01-A
90-3

Elastic-Plastic Fracture Analysis Emphasis on Surface Flaws

W. Reuter

The objective is to improve design and analytical techniques for predicting the integrity of flawed structural components. The research is primarily experimental, with analytical evaluations guiding the direction of experimental testing. Tests are being conducted on materials ranging from linear elastic to fully plastic. The latter extends beyond the range of a J-controlled field. Presently, compact tension and bend specimens are being used to develop state-of-the-art fracture toughness results. Specimens containing surface cracks are used to simulate the fracture process (crack growth initiation, subcritical crack growth, and catastrophic failure) that may occur in a structural component.

Metallography and microtopography techniques have been developed to measure crack tip opening displacement and crack tip opening angle for comparison with analytical models. Moiré interferometry techniques are used to evaluate and quantify the deformation in the crack region. These studies have resulted in the ability to predict crack growth initiation of a structure using constraint and fracture toughness data obtained from standard fracture toughness specimens. Future research will focus on predicting the stable crack growth process in base metal and the fracture process in weldments.

Diffusion bonded specimens are being used to simulate weldments. These specimens are used to study the ability of existing models to predict the fracture process for weldments.

This project is a collaborative program with the Massachusetts Institute of Technology.

Lawrence Berkeley Laboratory

Accelerator & Fusion Res Div \$132,000
University of California 06-C
Berkeley, CA 94720 90-3

Studies in Nonlinear Dynamics *A. Kaufman, R. Littlejohn*

Our research concerns the development of methods of modern nonlinear dynamics with applications to problems in physical and engineering sciences. We have been especially involved with Hamiltonian dynamical systems and the application of differential geometric and topological methods. A main area of application is wave systems, in which we have taken a broad, interdisciplinary perspective. Our interests have included the propagation, spectra, mode conversion, and tunnelling of waves. Major divisions of the program are: (1) A study of the properties of coupled wave systems, including elastic waves in solids, electromagnetic waves in optical media or plasmas, nuclear wave functions

in molecular physics, and many others; (2) The development of a new method for decoupling coupled wave systems, including systematic adiabatic perturbation schemes for this purpose; (3) The development of asymptotic quantization methods for coupled wave systems, i.e., the determination of normal mode frequencies and eigenfunctions; (4) Investigation of differential geometric and topological concepts such as Berry's phase, gauge structures, and topological singularities (such as monopole strings) which generically occur in coupled wave systems; (5) A systematic study of mode conversion (otherwise called Landau-Zener transitions), in which we apply bifurcation and catastrophe theory to categorize the basic types of mode conversion which can occur; (6) Investigations into coherence and radiometry in optics; (7) The development of theories of mode conversion applicable when nonlinear effects are important; and (8) A study of the non-Abelian gauge fields which occur in the separation of rotational and internal coordinates in the n-body problem (with applications to celestial mechanics, satellite control, and atomic, molecular, and nuclear physics).

Lovelace Medical Foundation

Bioengineering Research \$51,475
Albuquerque, NM 87108 03-B
93-3

Two-Phase Flow Measurements by NMR *E. Fukushima, S. Altobelli, A. Caprihan*

The objective of this grant is to apply NMR to study how mixtures of different phases flow. The concentration profile of one or both of the phases undergoing flow as well as velocity profile and other more esoteric quantities such as acceleration and diffusion can be measured without interfering with the flow. The non-invasive measurement of such parameters is especially difficult for concentrated mixtures that are opaque to the standard measurement medium such as light and sound waves but NMR works very well provided we examine proton containing liquids, e.g., water and oil, in nonmetallic containers.

Steady flows of concentrated suspensions in a circular pipe, first with a constant cross-section and then with a step expansion and contraction, have now been studied. Because NMR imaging is a fairly slow method, it is very important to

extend the NMR method to faster flows. As a point of reference, velocity images have been made in tens of minutes whereas the achievement of similar results in fractions of seconds will be a specific objective for the next few years.

University Of Maryland

Dept of Mechanical Engineering \$70,896
College Park, MD 20742 01-D
93-3

Characterization of Metal Cutting Dynamics *B. Berger, I. Minis*

The dynamics of metal cutting significantly affects the quality of machined parts and the productivity of the machining operation. Cutting instabilities for large material removal rates result in substantial annual losses of productivity, energy and material. The goal of this research project is to contribute towards efficient machine tools that require minimum human intervention. This will be accomplished through the intelligent control of the cutting process.

regions of parameter space and optimize the laser's operating conditions. Third, we are studying solid state devices. In the last year, we have been exploring the advantages of using Richardson extrapolation to stabilize several well-known schemes, and we have found that it is very beneficial. In the future, we intend to apply this approach to the study of quasi-phase-matched second harmonic generation which is of importance in obtaining sources which can write higher capacity compact disks.

University Of Maryland

Dept of Mechanical Engineering \$75,000
& Systems Research Inst 03-C
College Park, MD 20742 92-3

The Mechanics of Redundantly Driven Robotic Systems

L. Tsai

Gear backlash introduces rattling and position uncertainty in robotic systems. To overcome these difficulties, an innovative concept utilizing redundant drives to ensure positive coupling of gear meshes has been conceived. The objective of this research is to gain further understanding of the mechanics associated with such manipulating systems. Such systems can also be found in tendon-driven manipulators, wherein the redundant drives are used to maintain positive tension in tendons.

Force transmission characteristics associated with n -DOF manipulators controlled by $n+1$ actuators has been investigated. It is shown that actuator torques required to act against externally applied forces are functions of the structure matrix, its null vector, and the Jacobian matrix. Design equations for synthesizing a manipulator to possess isotropic transmission characteristics have been derived. The theory will be extended to n -DOF manipulators controlled by more than $n+1$ actuators.

A two-DOF wrist with three unidirectional drives has been designed to illustrate the principle. Actuators and gears are carefully sized to achieve the isotropic transmission characteristics. Driveline flexibility is included in the model as a primary concern. To make sure that backlash has been eliminated, reaction forces in the meshing

gears are carefully monitored. Preliminary simulation results indicate that driveline flexibility does have significant effects on the system stability. Backlash can be out of control, if the controller is not properly designed.

University Of Maryland

Dept of Mechanical Engineering \$132,000
College Park, MD 20742 01-C
91-3

Lagrangian Analysis of Contaminant Dispersal in Bounded Turbulent Shear Flows *J. Wallace, P. Bernard, J. Balint*

The objective of this project is to study the physical processes associated with turbulent scalar transport in shear flows with a view towards developing novel techniques for predicting contaminant dispersal in the environment. A closely coordinated experimental and theoretical research program is followed combining wind tunnel experiments using hot- and cold-wire probes, smoke visualizations and image processing, with numerical simulations. Temperature and concentration contours of point and line source diffusion in the boundary layer obtained from visualization data and from a numerical simulation of channel flow are being compared in order to verify the accuracy of the two techniques. A Lagrangian decomposition of the scalar transport correlation into fundamental physical processes is being carried out using ensembles of particle paths computed in the simulation of turbulent channel flow. This provides insight into the physical mechanisms underlying transport and how they may be modeled.

Images from the boundary layer flow visualization, at $Re=1070$, of the line source of smoke have been digitized and analyzed. It has been determined that there is a strong correlation between the momentum and mass fluxes and the vortical structures of the boundary layer wall region. In addition, temperature measurements have been carried out for comparison to the numerical simulation. Turbulent plumes emanating from line sources have been computed using a direct numerical simulation of channel flows. The mean scalar field and higher order statistics have been compared with the physical experiments as well as a series of computations we have performed using turbulent closures and random flight models.

University Of Massachusetts

Chemical Engineering Department \$ 0
Goessmann Laboratory 03-A
Amherst, MA 01003-0011 90-3

A General Procedure for the Synthesis of Process Flowsheets

J. Douglas, M. Malone

The goal of this project is to develop systematic procedures for the synthesis of processes for chemical manufacturing. The current aims are to develop general procedures for separation systems and multiproduct batch processes.

Douglas (AIChE J, 31, 353, 1985) developed a hierarchical procedure for continuous, single-product processes containing vapor-liquid mixtures. However, mixtures of vapors, organic liquids, aqueous liquids, and solids are common; fortunately, the material flows entering and leaving the process, the reactor, and the separation systems can be determined with minor extensions of the original procedure. The new procedure isolates vapors using a flash, removes solids in a filter or centrifuge, and separates the organic from aqueous liquids in a decanter. New synthesis methods have been developed for the solid and liquid recovery systems. The complete procedure appears to describe most flowsheets that appear in the literature as well as many new alternatives.

Multiproduct batch processes are treated by optimization of costs for raw materials, energy, late production, early production, and investment.

Simulated annealing has proven effective for (approximate) optimizations in the scheduling, design, retrofit, lot-sizing and parts of the process synthesis, for processes producing hundreds of products in dozens of units.

University Of Massachusetts-Lowell

Department of Electrical Engineering \$61,753
Lowell, MA 01854 01-C
91-3

Stability and Heat Transfer In Time-Modulated Flows

C. Thompson

This project represents a analytical/experimental effort directed toward understanding the processes generating boundary layer instabilities in time-modulated flows. In particular temporal modulations of the basic state by harmonic and free-stream vorticity is considered. The objectives of this work are to: develop an analytical model for development of instability, describe the growth and propagation of unstable disturbances occurring in the viscous region, investigate the stabilizing influence of steady-flow, examine global and local instability resulting from modulation of the free-stream near points of mean-flow stagnation, and categorize results suggestive of possible mechanisms for heat transfer.

It has been shown that for increasing modulation amplitude of a two dimensional oscillatory flow undergoes a subcritical transition from the 2-D Stokes boundary layer to a state where streamwise oriented vortices appear. The temporal growth of these streamwise vortices is the result of the imbalance between the centrifugal force and the pressure. The most unstable axial position along the channel corresponds to the location where the convex wall curvature is maximum. For a fixed value of the wall curvature, instability ensues above the critical value of the Taylor number. The most unstable of these wavenumbers or primary mode persists through amplitude saturation and chaos. It has been found that this mode undergoes successive period-doubling temporal bifurcations to chaotic motion. However, if subharmonic spatial wavenumbers are initially present in the disturbance spatial bifurcation can also occur.

Massachusetts Institute Of Technology

The Energy Laboratory
Cambridge, MA 02139

\$122,300
03-B
91-3

Metal Transfer in Gas Metal Arc Welding *T. Eagar, J. Lang*

The objective of this project is to find new control methods to improve metal transfer in gas metal arc welding -- a widely used manufacturing process. A lumped-parameter mathematical model of the system is being developed with the goals of being suitable for real-time control system design, yielding additional physical understanding, and being readily usable by researchers and engineers.

A novel gas metal arc welding experiment, which modifies the fundamental way metal is transferred in the welding process, has been designed and constructed. The experiment uses mechanical energy as a new control input to the welding process. The metal electrode is vibrated axially during welding at the desired frequency of drop detachment in order to force the detachment of metal drops. The experiment is being used to explore new modes of metal transfer and for testing algorithms for detecting and controlling these modes.

The mathematical model being developed captures the instantaneous dynamics of drop detachment. Hitherto, dynamic electrode melting models have only sought to capture the average of the process. The model being developed in this project captures the instantaneous geometric evolution of drops melting on the end of an axially moving electrode. This model also has potential uses for droplet systems other than welding.

Massachusetts Institute Of Technology

Energy Laboratory
Cambridge, MA 02139

\$105,000
03-A
91-3

Synthesis and Optimization of Integrated Chemical Processes *L. Evans, P. Barton*

The goal of this research program is to develop new systematic methods for the synthesis and

optimization of chemical processes. As the chemical industry is one of the largest consumers of energy in the US, it is important to find efficient and creative computer-aided design strategies for developing new manufacturing processes, and retrofitting existing plants.

The general philosophy of this research is to develop, in an university environment, innovative generic methodologies for solving problems of industrial importance. These methods are then demonstrated by using prototype software to solve problems typical of those encountered in industry.

Research is currently considering two topics. A long term program that focuses on synthesis techniques for achieving increased energy efficiency through better heat and work integration is culminating with an investigation of the simultaneous synthesis and optimization of the chemical process, its heat exchange network, and the utility system. Secondly, a new initiative is addressing the need for process design and optimization technologies for batch/semi-continuous processes. Such processes are of increasing industrial importance for the manufacture of high-value added specialty products and pharmaceuticals, which have relatively short product life cycles. Research is therefore focusing on the development of computer-aided design tools for rapid and efficient process development.

Massachusetts Institute Of Technology

Lab for Manufacturing & Product
Cambridge, MA 02139

\$158,000
03-B
91-3

Multivariable Control Of The Gas-Metal Arc Welding Process *D. Hardt*

In previous work, a basic approach to the problem of control of welding processes using multivariable adaptive control theory was established and a set of non-stationary process transfer functions for both the thermal and geometric aspects of the process, capturing the non-linear dynamics and statics, were developed. In addition, depth estimators based on real-time inverse heat transfer solutions and surface temperature measurements have been developed.

All of these models are being incorporated into line-spring finite elements for surface-cracked plates and shells, providing simple and extraordinarily accurate analysis and simulation of these important engineering flaws.

Massachusetts Institute Of Technology

**The Energy Laboratory
Cambridge, MA 02139**

**\$133,000
01-A
91-3**

Basic Engineering Sciences of Solids Comminution

C. Peterson, H. Kytomaa, F. McClintock

Comminution of energy materials is energy intensive; one of the principal sources of inefficiency in many classes of devices is the presence of excessive fines within the coarse medium. The fines cause an unwanted shielding of the coarse medium and impose multiple passes on the feed (e.g. roller tables, ball mills) resulting in frictional losses. This study investigates the mechanics of rapid fines removal to provide design criteria for a new generation of comminution machines with a significantly elevated comminution efficiency.

It is well known that dense, size distributed particulate media have a natural tendency to segregate in the presence of flow and gravity, although these effects remain poorly characterized and are typically viewed as a hindrance. Here, the aim is to understand and incorporate these phenomena to improve comminution efficiency. Using a cylindrical rotary crusher, the research studies particle segregation by means of unsteady fluidization in vertical and near vertical configurations. In the conceptual device, the time scale of the unsteadiness is the period of rotation. The goal is to achieve full separation in minimal time to accommodate a large and efficient comminution throughput.

Experiments have been conducted with bidisperse mixtures of silica spheres (50-3000 micrometers in diameter) in water with impulsively started fluidization. The results of numerous experiments are summarized with the following observations:

- segregation of bidisperse mixtures can be achieved with impulsive fluidization, even for systems in which the fines are sufficiently large to

prevent their percolation through the coarse matrix. It has been found that separation critically depends on the initial formation of an upward propagating pocket within which segregation occurs: coarse particles rain down through it while fines remain fluidized, leaving a fines-free bed of coarse particles below. Segregation is markedly reduced in the absence of this structure.

- the limiting factor to the speed of segregation and hence fines through-put is the speed of the leading edge of the pocket. This interfacial speed is directly linked with the rate at which coarse particles can become detached from the above binary dense-pack. The present work is addressing the mechanics of this process theoretically and experimentally.

The program aims to develop the theoretical base of understanding for particulate segregation phenomena in a variety of configurations to help improve processes in which segregation is either desired, as it is here, or unwanted, as in mixers for example.

Massachusetts Institute Of Technology

**Dept of Mechanical Engineering
Cambridge, MA 02139**

**\$116,846
01-C
92-3**

Rheological and Flow Characteristics of Dense Multiphase Slurries Employing a Bimodal Model

R. Probstein

This research aims to develop a rational theoretical and experimental methodology for the rheological and flow property prediction of dense-phase slurries with particles distributed in size from submicron to several hundred microns. The approach models a polydisperse suspension as inherently bimodal, wherein it is considered to be made up of a fine fraction which behaves colloidally and imparts to the suspension many of its important rheological and flow characteristics, and a coarse fraction which behaves as if it were in a pure liquid with the same viscous behavior as the colloidal suspension and raises the apparent viscosity through hydrodynamic interactions. To describe the behavior of the coarse fraction, a viscosity equation based on lubrication concepts was applied to suspensions of non-colloidal particles. The equation derived for monodisperse

suspensions was also shown to apply remarkably well to bidisperse and polydisperse suspensions. The polymodal particle size was either uniformly or log-normally distributed, and the broadest size range was 37-212 microns. The maximum packing of these suspensions obtained from viscosity measurements were found to be equal to the dry random packing of the same particles divided by 1.19. This is a new dilatancy factor likely to be associated with lubrication layers between the particles. The viscosity equation was also used to describe the behavior of bidisperse suspensions with a very large particle size ratio. Here, the bidisperse viscosity was simulated using the bimodal model. The viscosity equation again matched well with the simulated data. The calculated values of maximum packing fraction were consistent with the experimental values for smaller size ratios. This lends further support to the validity of the bimodal model. The bimodal approach was next applied to the high-shear-limit viscosity of a polydisperse suspension with a size range from submicron to 40 microns. The separating particle size that divided the distribution into a fine and a coarse fraction was found to be 1.5 microns. It was determined so as to give the best fit between the bimodal model and experiment. The result for the separating particle size showed that the fine fraction is indeed colloidal.

Massachusetts Inst Of Tech¹

Dept of Chemical Engineering \$60,855
 Cambridge, MA 02139 06-C
 91-3

Los Alamos National Lab²

MEE-9 \$108,000
 Los Alamos, NM 87545 06-C
 91-3

Sandia National Laboratories³

Division 1512 \$98,000
 Albuquerque, NM 87185 06-C
 91-3

Macrostatistical Hydrodynamics

H. Brenner¹, A. Graham², L. Mondy³

This research combines theory, experiments and numerical calculations to focus on slow flows of suspensions in which colloidal and inertial effects are negligibly small (Macrostatistical Hydrodynamics). We conduct nuclear magnetic resonance imaging experiments to quantitatively measure

particle migration occurring in concentrated suspensions undergoing a flow with a nonuniform shear rate. These experiments address the issue of how the flow field affects the microstructure of suspensions. In order to understand the local viscosity in a suspension with such a flow-induced, spatially varying concentration, one must know how the viscosity of a homogeneous suspension depends on such variables as solids concentration and particle orientation. We employ the technique of falling-ball viscometry, using small balls, as a method to determine the effective viscosity of a suspension without affecting the original microstructure significantly. We also obtain data from dispersivity experiments in which the detailed fluctuations of a falling ball's velocity indicate the noncontinuum nature of the suspension and may lead to more insights into the effects of suspension microstructure on macroscopic properties. Finally, we are beginning to perform other experiments in quiescent suspensions, measuring the slip on a rotating sphere and the pressure drop caused by a falling ball (in contrast to the use of conventional rotational viscometers which impose a macroscopic shear on the suspension) in order to learn more about the microstructure and boundary effects in concentrated suspensions.

University Of Minnesota

Dept of Aero Eng & Mechanics \$205,000
 Minneapolis, MN 55455 01-C
 93-5

Lubricated Transport of Viscous Materials

D. Joseph

The focus of the research is studies of lubricated transport of viscous materials: viscous crude oils, concentrated oil/water emulsions, slurries and capsules. We have emphasized problems which arise in pipeline applications. Four categories of study are underway. The first is the study of the fluid dynamics of core flows emphasizing studies of stability and, more recently, problems of start-up, lift-off and eccentric flow when gravity causes the core flow to stratify. We have also correlated all the available data on friction factors and hold-up for core flow and shown good agreements between experimental data and $k - E$ models in turbulent flow.

A second category of studies treats the problem of fouling of pipe walls with oil, with undesirable increases in pressure gradients and even flocking.

We propose to do the first studies of rates of fouling as they depend on the parameters of lubricated pipelining together with remedial strategies based on the manipulation of the materials of wall construction. The remedial strategies may go a long way in relieving the main problems impeding lubricated pipeline technology.

The third category is to gain an understanding of the mechanisms of flow-induced migration of particles leading to lubricated configurations. For this, we do direct numerical simulations in which the particles are moved according to their equations of motion by hydrodynamic forces computed exactly. One goal of this study is to see if lift forces proportional to the square of the velocity are strongly involved in fast flow of slurries, capsules and oils.

The fourth category of problems is the lubricated transport of concentrated oil/water emulsions.

University Of Minnesota

Dept of Mechanical Engineering \$141,904
Minneapolis, MN 55455 06-C
92-4

Thermal Plasma Processing of Materials
E. Pfender, J. Heberlein

The objective of this research project is to study analytically and experimentally specific thermal plasma processes for materials treatment. Processes of interest include the synthesis of ultrafine ceramic powders and of diamond films.

During the past year, we have concentrated on (a) characterizing the deposition process of diamond films over larger areas, and (b) studying the TiO₂ submicron powder synthesis process experimentally and theoretically.

The deposition of diamond films over a larger area required tailoring the substrate cooling such that a uniform substrate temperature was obtained in spite of strongly non-uniform heating by the plasma jet. Modeling of the heat flux distribution in the substrate holder led to specific substrate holder designs resulting in a temperature variation of only +/-20°C over a 50 mm diameter substrate, and a uniform film growth over this region at growth rates of 200 μm/hr.

The submicron TiO₂ powder synthesis required several apparatus modifications-for maximizing the rutile phase in the product. At present, we are modeling the temperature and species distribution in an induction plasma reactor for optimization of the reactor design for obtaining a single phase product.

National Academy of Sciences/ National Research Council

Washington, DC 20418 \$1,064,701
06-C
Department of Energy Integrated 92-3
Manufacturing Fellowship Program
B. Kuhn

Twelve three-year predoctoral fellowships in integrated manufacturing have been awarded by the National Research Council, under the aegis of the National Academy of Engineering following a national competition. The winners were selected from a pool of 144 applicants by a panel of 15 engineering scholars and industrial experts. The objective of the program is to create a pool of PhD's trained in the integrated approach to manufacturing, to promote academic interest in the field, and to attract talented professionals to this challenging area of engineering.

The fellowship program was conceived as one response for the loss of competitiveness of the United States in manufacturing. Recent studies of manufacturing in the United States showed a need for a more integrated approach to manufacturing than that prevailing in industry today. Two related aspects of the problem are the traditional separation of the product design function from the manufacturing function and the lack of an appreciation for the process of manufacturing as an integrated system.

It is expected that the improved manufacturing methods which this fellowship aims to bring about will contribute to improved energy efficiency, to better utilization of scarce resources, and to less degradation of the environment.

National Center for Manufacturing Sciences

Technology Sourcing
Ann Arbor, MI 48108

\$45,500
06-C
93-2

Industrial Liaison Pilot Program

J. Sheridan

The National Center for Manufacturing Sciences has been funded by DOE, Basic Energy Sciences, to direct a program which will place employees of the National Laboratories at industrial sites to work with their corporate colleagues on issues of importance to manufacturing industry. The goals of the program are to evolve expertise in a broad range of manufacturing issues at the National laboratories, identify fundamental DOE research needs, and build a long-range sustained commitment to collaboration on industrial issues both at DOE and within industry. Results from the Liaison Program will strengthen industry's energy efficiency in its operations by enhancing the quality of the total product and developing efficient production and management techniques. This will directly benefit American manufacturing competitiveness and will help DOE Basic Energy Sciences identify fundamental research needs in energy efficient industrial methodologies and technologies.

A pilot program will be conducted to immediately place a limited number of workers and carefully evaluate the effectiveness of a sustained program. The pilot program is important. There are a number of potential risks and blockers which need to be assessed carefully before a large commitment is made. The Industrial Liaison Program (ILP) will place DOE laboratory workers into the industrial environment to focus the attention of the laboratories on industry issues. The worker will remain a full time employee of the Laboratory but the costs of the off-site per diem will be shared by the host company through a formula-based reimbursement.

National Institute Of Standards & Technology

Thermophysics Division
Gaithersburg, MD 20899
Boulder, CO 80303

\$551,000
03-B
91-5

Development of Measurement Capabilities for the Thermophysical Properties of Energy-Related Fluids

R. Kayser, J. Levelt Sengers, M. Moldover, W. Haynes

The major objectives of this project are to develop state-of-the-art experimental apparatus that can be used to measure the thermophysical properties of a wide range of fluids and fluid mixtures important to the energy, chemical, and energy-related industries and to carry out carefully selected benchmark measurements on key systems. The specific measurement capabilities completed (denoted by asterisk) or under development include new apparatus for transport properties (tantalum-hot-wire thermal-conductivity apparatus, vibrating-wire viscometer), thermodynamic properties (dual-sinker densimeter, high-temperature vibrating-tube densimeter, total-enthalpy flow calorimeter), phase equilibria properties (recirculating phase equilibria apparatus, low and high-pressure ebulliometers, re-entrant radio-frequency resonator), and dielectric properties (concentric-cylinder dielectric-constant apparatus). These new apparatus will extend significantly the existing state of the art for properties measurements and make it possible to study a wide range of complex fluid systems (e.g., highly polar, electrically conducting, and reactive fluids) under conditions which have been previously inaccessible. This project also includes benchmark experimental measurements on alternative refrigerants and refrigerant mixtures (completed and ongoing), aqueous solutions, and carefully selected systems consisting of species of diverse size (methane + neopentane) and polarity (methane + ammonia) that are important to the development of predictive models for energy-related fluids.

National Institute Of Standards & Technology

Electromagnetic Technology Div \$ 0
Boulder, CO 80303 06-C
89-3

Low Resistivity Ohmic Contacts Between Semiconductors and High-T_c Superconductors
J. Moreland, J. Ekin

The purpose of this project is to fabricate and characterize contacts between high-T_c superconductors (HTS) and semiconductors. Developing a method for optimizing the current capacity of such contacts will extend the application of HTS materials to semiconductor hybrid technologies that have HTS interconnects (both on-chip and package) and proximity HTS/semiconductor/HTS SNS Josephson Junctions. Presently, these are some of the most promising HTS applications, but an essential first step is the development of stable ohmic contacts between semiconductors and HTS materials.

The project is now focused on YB₂Cu₃O_x (YBCO) thin-films grown on Si wafers. Recent discoveries have shown that it is possible to grow high quality HTS films on Si using laser ablation deposition and a yttria stabilized zirconia buffer layer between the YBCO film and the Si. Processing steps are being optimized for depositing and patterning YBCO films on Si to form contact vias to the Si substrate. The goal is to minimize the specific resistance of the contacts using techniques that are compatible with standard Si processing.

The City University Of New York

The City College \$89,804
The Benjamin Levich Institute 06-C
for Physico-Chemical Hydrodynamics 90-3
New York, NY 10031

The Rheology of Concentrated Suspensions
A. Acrivos

This research program aims to investigate the flow of concentrated suspensions of non-colloidal particles from the fundamental point of view. Earlier studies by the Principal Investigator and his associates have shown that the rheology of such systems is strongly affected by the shear-induced migration of particles from regions of high shear to

low and from regions of high particle concentrations to low which, by distorting the particle concentration profile, can lead to an erroneous interpretation of the experimental measurements. This shear-induced particle diffusion is also responsible for the phenomenon of viscous resuspension whereby in the presence of shear flow, a settled bed of heavy particles can resuspend even under conditions of vanishingly small Reynolds numbers.

Viscous resuspension was studied both theoretically and experimentally in various unidirectional flows, e.g. a 2-D Hagen-Poiseuille flow, as well as a Taylor-Couette system, and excellent agreement has been found to-date between the experimental results and the theoretical predictions even though the latter do not entail the use of adjustable parameters. In addition, the stability of the resulting stratified two-phase flows was investigated theoretically on the basis of a small disturbance stability analysis, and again good agreement was found between the theoretically predicted conditions for the onset of growing disturbances and experimental observations regarding the appearance of interfacial waves.

The City University Of New York

The City College \$126,528
Department of Chemical Engineering 03-A
New York, NY 10031 91-3

Partial Control of Complex Processing Systems

R. Shinnar, I. Rinard

There are two research objectives. One is to understand the control of Fluidized Catalytic Crackers (FCC's), an important goal in itself due to the central role played by FCC's in modern refineries. The second is to use the FCC as an example to learn about the control of complex chemical plants. The FCC control problem is rich enough to contain many of the nonlinear features found in such plants.

A dynamic simulation model of the FCC has been developed for these studies. It is based on a recently published model but contains many enhancements which insure that its behavior is representative of current FCC operation.

The work has demonstrated that the performance of FCC's in the region of current operation exhibits five multiple steady-states as well as input multiplicities of some of the important manipulatable variables. This size of the region of five steady-states can be greatly reduced by the use of a combustion promoter. This helps explain why the use of a promoter is so popular in the industry even though its use has little economic benefit other than better controllability.

The City University Of New York

The City College \$102,500
The Benjamin Levich Institute 06-C
of Physico-Chemical Hydrodynamics 91-3
New York, NY 10031

Studies in Premixed Combustion

G. Sivashinsky

The objective of this research is a combined analytical and numerical study of the influence of various hydrodynamic, thermal-diffusive and reaction rate factors on speed, shape, stability and the extinction limits of premixed gas flames. Different modelling techniques will be employed to reduce the study of the pertinent combustion systems to simple approximate problems tractable either analytically or numerically. Specifically, the project is concerned with (1) the dynamics of premixed flames spreading through a one- and multiple-scale system of eddies and with the further development and refinement of the associated cascade-renormalization concept of turbulent flame speed; (2) the intrinsic dynamics and the pattern formation in premixed flames sustained by the thermal-diffusive and thermal expansion induced mechanisms of flame instability; (3) the hydrodynamical aspects of combustion limits with particular attention to the phenomena of flame extinction by one- and multiple-scale periodic flow fields and extinction in upward and downward propagation flames in tubes; and (4) the development of new numerical methods especially assigned for the free-boundary problems of flame-flow interaction and spontaneous pattern formation in premixed flames.

Northwestern University

Engineering & Applied Science \$89,450
Evanston, IL 60208 03-B
93-3

Thin-Film Characterization and Flow Detection

J. Achenbach

This work is concerned with the determination of the elastic constants of thin films deposited on substrates, with the measurement of residual stresses in such films and with the detection and characterization of defects in thin film substrate configurations.

There are many present and potential applications of configurations consisting of a thin film deposited on a substrate. Thin films that are deposited to improve the hardness and/or the thermal properties of surfaces are of principal interest in this work. Thin film technology does, however, also include high T_c superconductor films, films for magnetic recording, superlattices and films for band-gap engineering and quantum devices. The studies carried out on this project also have relevance to these applications.

Both the film and the substrate are generally anisotropic. A line-focus acoustic microscope, is being used to measure the speed of surface acoustic waves (SAW) in the thin film/substrate system. This microscope has unique advantages for measurements in anisotropic media. Analytical and numerical techniques are employed to extract the desired information on the thin film from the measured SAW data. Recent results include: (1) analytical and numerical techniques for the direct problem and the inverse method, (2) measurements of superlattice film constants, (3) investigation of the effect of surface roughness and (4) measurements of residual stresses in thin films.

have completed our studies of stretching, breakup, and dispersion of viscous droplets in chaotic flows. As a result of these studies we developed a method to measure the interface between two liquids based on the complete surface tension-driven time evolution of a stretched filament, including satellite and sub-satellite formations, in terms of Boundary Integral Equation Methods. Two important extensions are also being pursued: Mixing of non-Newtonian fluids and chaos-enhanced transport. The non-Newtonian area consists of two sub-projects: (i) mixing of viscoelastic fluids (Boger fluids), and (ii) mixing of shear thinning fluids. Area (i) involves both experiments and computations whereas (ii) is exclusively computational. The chaos-enhanced transport focuses on transport to and from cavities, the flow within the cavity being modulated by a wavy flow and the cavity itself possessing, possibly, a multicellular structure. These two last areas will comprise the bulk of our efforts for the next year and beyond.

Northwestern University

Dept of Eng Sci & App Math \$68,058
 Evanston, IL 60208 06-C
 92-3

Stability and Dynamics of Spatio-Temporal Structures *H. Riecke*

This research will be concerned with a study of physical systems which exhibit a transition from a homogeneous state to a spatial and/or temporal structure when driven sufficiently far from thermodynamic equilibrium. Such non-equilibrium structures are found, for instance, in fluid dynamics - Rayleigh-Benard convection and Taylor vortex flow -- and in solidification -- Mullins-Sekerka instability. They also serve as paradigms for non-equilibrium structures in general which arise in other fields such as chemistry and mechanics.

Specifically, the research focusses on localized waves observed in binary-mixture convection. They have been described theoretically as dissipatively perturbed soliton solutions of the complex Ginzburg-Landau equations. However, it has been found that the resulting predictions qualitatively disagree with certain aspects of the observations. The present work will build on an extension of these equations derived earlier, which

incorporates an additional slow time-scale due to the slowness of mass diffusion. The derivation will be considered for more realistic conditions. The velocity of the waves will be calculated in a perturbation around the soliton. The effect on plane waves will be investigated.

In addition, localized structures in the form of domain walls will be studied. Arrays of such walls are related to zig-zag structures as found in isotropic and anisotropic convection.

University Of Notre Dame

Department of Chemical Engineering \$60,246
 Notre Dame, IN 46556 01-C
 92-3

Wave Dynamics on Falling Films and Its Effects on Heat/Mass Transfer *H-C. Chang*

Wave formation on a falling liquid film can be a desirable phenomenon since the waves enhance interphase heat or mass transfer in many industrial gas-effluent cleaning devices (scrubbers) and in some solar energy collectors. In paper and optical fiber coating processes, however, waves tend to reduce the coating quality and lower the production rate. This project is to investigate how the waves are formed, how they can be removed and how they can enhance heat/mass transfer. Our approach is to combine theoretical techniques from Dynamical Systems theory, numerical simulation, and experiments to achieve these goals. With the first two techniques, we have been able to understand the primary, secondary and tertiary transitions of waves from nearly sinusoidal waves at the inlet to the solitary waves downstream. It is the only hydrodynamic instability that is understood beyond the primary inception. Our nonlinear analysis allows us to associate drop formation during fiber coating to a blow-up solution. We are currently developing the wavelet numerical method for wave evolution, finalizing an experiment for falling film and using renormalization group theory to predict interphase transfer from the predicted wave spectra. Feedback control to stabilize the waves will soon be attempted.

University Of Notre Dame

Department of Chemical Engineering \$54,000
Notre Dame, IN 46556 01-C
91-3

Study of Interfacial Behavior in Cocurrent Gas-Liquid Flows

M. McCreedy

The objectives of this work are to develop a mechanistic and mathematical understanding of various types of small-scale (e.g., waves) and large scale (e.g., slugs) disturbances that are observed in cocurrent gas-liquid flows.

Measurements of wave properties (e.g., speed, wavelength, amplitude and rates of evolution) are used to verify linear and nonlinear theoretical approaches that are based on simplifications of the Navier-Stokes equations. Most of this work is done at conditions close to neutral stability where definite comparisons of theory and experiments are possible.

Currently, several important secondary wave transitions are being studied. These are: (1) formation of waves with twice the wavelength of the fundamental (i.e., subharmonics); (2) initiation of very long wavelength modes that can grow into roll waves or slugs; (3) formation of transverse modes which lead to greater dissipation and a degree of stabilization of the flow. It is found that weakly-nonlinear theory gives insight into these secondary transition mechanisms that cannot be understood using only linear theory. An additional topic of current interest is determination of the features of turbulence that must be incorporated into linear and nonlinear theories to accurately describe the generation and evolution of waves.

Oak Ridge National Laboratory

Engineering Physics \$1,250,000
and Mathematics Division 03-C
Oak Ridge, TN 37831 87-5

Center for Engineering Systems Advanced Research (CESAR)

R. Mann, F. Pin

The Center for Engineering Systems Advanced Research [CESAR] is established at Oak Ridge National Laboratory to address long-range, energy-related research in intelligent machine systems. These systems are intended to plan and

perform a variety of tasks in incompletely known environments, given only qualitatively specified goals. The Center provides a focal point for interdisciplinary research in machine intelligence, cognitive systems, advanced control, and systems engineering. Research objectives are chosen to address the technology-base requirements for DOE missions that rely on the use of robotics and intelligent machines. In particular, research concentrates on issues related to autonomous systems, unstructured dynamic work environments, and multiple cooperating robotic systems. Results from CESAR research in automation-related technologies and intelligent machines can increase productivity and safety in the development and operations of DOE-sponsored systems. Potential and actual applications include emergency situations, remote operations, resource exploration, transportation systems, advanced power generation systems, and environmental restoration and waste management.

CESAR is intended to be a national resource, and a major objective is to disseminate R&D accomplishments freely and comprehensively. Results and technology advancements are distributed through publications in the scientific literature, through organization of workshops on selected topics, and through the development of prototype systems that demonstrate concepts and new methodologies. CESAR cooperates with universities, laboratories and industry, serving as a collaborative research facility to provide guests with access to state-of-the-art and often unique equipment in a stimulating research environment.

Ohio State University

Physics Department \$69,000
Columbus, OH 43210 06-C
91-3

Turbulence and Spatio-Temporal Chaos *C. Jayaprakash, F. Hayot*

This program deals with the dynamics of extended (with many degrees of freedom), dissipative, non-linear systems.

An important issue in this area concerns the existence of effective stochastic equations to describe the long wavelength properties of partial differential equations that exhibit deterministic chaos. We are currently studying the Kuramoto-

The reflectometer possesses flexibility of use and precision which are superior to any similar devices described in the literature. The need for such an instrument stems from the direct dependence of Monte Carlo results on the accuracy of surface property information. Measurements have been taken for several materials possessing varying degrees of diffuse and specular reflecting characteristics.

A common assumption made, in analyzing radiant heat transfer among surfaces, is that the reflectance is independent of the azimuthal angle of the incident beam. Measurements of BRDF for striated surfaces indicate that, for a broad class of surfaces, this assumption can lead to significant error. Our instrument has the capability for complete surface property description which will allow Monte Carlo simulation of surface arrays to be made without the inherent errors resulting from the azimuthal angle assumption.

Pacific Northwest Laboratory
Battelle Memorial Institute \$104,000
Richland, WA 99352 01-B
 91-3

Radiative Transfer Through Arrays of Discrete Surfaces with Fixed Orientation
M. Drost

Radiative heat transfer in an array of discrete surfaces, is an important and poorly understood class of radiative heat transfer problems. The objective of this study is to develop an understanding of the impact of array geometry, surface properties, and incident radiation characteristics on radiation heat transfer in the array. The results of the study will be used to establish criteria for the valid application of participating media models to arrays of fixed discrete surfaces.

The approach consists of using an innovative Monte Carlo model to evaluate radiation heat transfer in arrays of fixed discrete surfaces with a range of array configurations. The Monte Carlo model will be validated by comparison with experimental results being developed at Oregon State University. The Monte Carlo simulations will be used as a benchmark for comparisons with different analytical approaches that model the array as a participating medium.

FY 1993 accomplishments consist of: 1) the Monte Carlo code has been completed and validated against other Monte Carlo results, 2) simulation of a range of array geometries showed, that radiation heat transfer in most arrays of practical interest can not be predicted solely on the scattering properties of an individual element but, also depend on the geometric arrangement of the elements. Accurate modeling of radiation heat transfer in arrays will, in most cases, require that the array is modeled as discrete surfaces rather than as a homogeneous media, 3) parametric studies have shown that the inclusion of polarity in Monte Carlo modeling can have a significant effect on the results of the Monte Carlo simulations and needs to be considered by other researchers, and 4) one technical paper was published in FY 93 and two journal articles were submitted to journals for publication in 1993.

University Of Pennsylvania

Mechanical Engineering Dept \$101,400
Philadelphia, PA 19104 01-C
 92-3

Active Control of Convection
H. Bau

Active, feedback control strategies to alter the structure of convection in a fluid layer heated from below and cooled from above (the Rayleigh-Benard problem) are studied experimentally and theoretically. The objectives are to (i) stabilize the no-motion state of Rayleigh-Benard convection (delay to higher values of the Rayleigh number the transition from the no-motion to the motion state); and (ii) suppress (laminarize) oscillatory, chaotic convection. This work is a continuation of an effort in which it was successfully demonstrated that feedback control can be used in a thermal convection loop to tame chaos. The results of this work may be of importance, among other things, to materials processing and crystal growth applications in which it is desirable to eliminate convective currents or suppress oscillatory convection. What is learned during this research may also be useful for devising control strategies for other non-linear flow phenomena. Thus far, it has been theoretically demonstrated that, with the aid of a feedback controller, the transition from the no-motion to the motion state can be significantly delayed. An apparatus for experimental

verification of theoretical predictions is under construction and a computer code to study time-dependent flows is under development.

Pennsylvania State University

Mechanical Engineering Dept \$95,793
University Park, PA 16802 06-B
92-3

Experiments on the Gas Dynamics of the HVOF Thermal Spray Process **G. Settles**

High Velocity Oxy-Fuel (HVOF) thermal spray technology has grown in a decade to become second only to plasma spraying in the application of metallic coatings. HVOF coatings have desirable high densities and other potential advantages of economy and simplicity.

Because HVOF uses high-speed gaseous combustion products to heat and accelerate metal particles, the gas dynamics of the process exerts a profound influence on its performance. However, commercial HVOF equipment has yet to exploit this potential. The objective of this research is to conduct experiments and modeling of HVOF gas dynamics, thus to improve the process.

Schlieren visualizations reveal that the supersonic HVOF jet undergoes very rapid turbulent mixing with the atmosphere. Planned experiments will examine and attempt to reduce this mixing, using analysis of the oxide content of sprayed coatings as a measure of success. Analysis and experiments are also being performed to optimize the design and operation of the supersonic HVOF spray nozzle. The heat and momentum transfer between the gas and sprayed particles are also being examined.

Ultimately, an improved HVOF apparatus embodying gas-dynamic principles will be designed and tested. Technology transfer from rocket propulsion and supersonic aerodynamics is a key element of this project.

Physical Sciences Inc.

20 New England Business Center \$130,000
Andover, MA 01810 06-A
92-4

Experimental and Theoretical Studies of Multicomponent Vapor Condensation **G. Wilemski, B. Wyslouzil**

This research program comprises experimental and theoretical studies of nucleation and condensation in multicomponent gas mixtures. The program goals are: (1) to improve basic understanding of nucleation and droplet growth, (2) to stringently test theories of nucleation at high nucleation rates and under nonisothermal conditions, (3) to develop improved theories where needed, (4) to enlarge the data base for systems of both fundamental and practical interest, and (5) to provide reliable means for predicting the behavior of mixtures in practical devices and in the atmosphere. Condensable vapors, mixed with a carrier gas, are cooled in a supersonic Laval nozzle to obtain high nucleation rates under steady state conditions. Interferometry and laser light scattering are used to detect the "onset" of condensation and to monitor subsequent droplet growth. Theoretical calculations of the droplet size distribution along the flow axis are performed to assess competing theories of nucleation and droplet growth. A new experimental apparatus is also being constructed to study binary nucleation in mixtures of sulfuric acid and water vapor

Recent nozzle experiments with a fixed water or ethanol vapor pressure reveal a small increase in the onset temperature of condensation that accompanies a decrease in the carrier gas stagnation pressure from 3 to 0.5 atm. This effect can be quantitatively explained by the changes that occur in the boundary layer displacement thickness and the heat capacity of the flowing gas at different pressures. The results provide no evidence for the role of energy transfer limitations on nucleation under conditions of excess carrier gas in the atmospheric pressure range. Other recent experimental and theoretical studies of ethanol condensation have shown that the relative importance of nucleation and droplet growth at onset changes dramatically depending on the

Seven biaxial low-cycle fatigue tests with stainless steel tubular specimens at 538°C have been completed. During these tests, the voltage drop was monitored using a reversing DC potential drop measuring apparatus. A new method of data analysis and smoothing was developed which showed a significant increase in voltage drop in the area of crack formation. Analysis of the theoretical solution for the voltage drop for a semi-elliptical crack in an infinite medium showed similar shapes. Testing and analysis are continuing.

Rensselaer Polytechnic Institute

Dept of Nuc Eng & Eng Physics \$ 0
Troy, NY 12180-3590 06-C
89-4

The Continuum Modeling of Two-Phase Systems

R. Lahey, Jr., D. Drew

This research is concerned with the development of a physically-based, well-posed multidimensional two-fluid model which can be used for the prediction of a wide variety of commercially important multiphase flows.

Significant progress has been made in the modeling of bubbly two-phase flows. The approach taken was to analytically derive the various interfacial closure laws using cell-model, ensemble averaging techniques. In particular, it was assumed that the continuous (liquid) phase was inviscid and irrotational.

The resultant two-fluid model has been numerically evaluated using PHOENICS, a computational fluid dynamic (CFD) solver, and these results have been found to agree very well with a wide range of phase distribution data. Moreover, the dispersion relation of this two-fluid model has shown that it is capable of predicting both sonic and void wave propagation phenomenon and the bubbly/slug flow regime transition.

Further research is expected to focus on heat transfer phenomena, the effect of bubble distortion on lateral lift, the modeling of other flow regimes and the modeling of two-phase turbulence (particularly intermittency and the coherent structures).

Rensselaer Polytechnic Institute

Dept of Chemical Engineering \$88,379
Troy, NY 12180-3590 01-C
93-4

Development and Use of Image Scanning Ellipsometer to Study the Dynamics of Heat Thin Liquid Films

P. Wayner, Jr.

The physicochemical phenomena associated with fluid flow and change-of-phase heat transfer in ultra-thin (thickness less than 10^{-5} m) liquid films are being studied. Microscopic image processing equipment, procedures, and related computer programs are being developed to improve data resolution and automate data acquisition. First, the image processing equipments are being developed and used in conjunction with an interferometer designed to study the transient film thickness in draining and evaporating films. The glass cell is designed to optimize temperature control, cleanliness and simplicity. The optical data is obtained using a video camera attached to a microscope through which the interference fringes are recorded. Transport processes in various fluids, with and without heat transfer, are being experimentally studied and analyzed. Using the results of these studies, an image processing ellipsometer (which can measure thinner films with thicknesses down to a nanometer) has been designed, constructed and used. The long term objectives are to measure and model transport processes in thin films. The near term objective is to develop microscopic image processing equipment and a complementary experimental cell.

Rice University

Dept of Civil Engineering \$87,560
Houston, TX 77251 01-A
91-3

Stochastic Quadrization for Probabilistic Analysis of Large Compliant Off-Shore Structures

P. Spanos

Nonlinear wave forces acting upon offshore structures have been examined from a system identification perspective. The nonlinearities are induced by the wave-structure interaction effect, and may become non-negligible in many situations, especially for large energy producing systems. They are not necessarily in Morison's form in terms of squared relative velocities or they

are not calculated by diffraction theory. Various wave force models have been examined. A particular force function which is adopted for a given class of problems has been expanded in terms of the wave and structural kinematics. The resulting nonlinear system has been decomposed into a number of parallel no-memory nonlinear systems, each followed by a finite-memory linear system. For such multi-input linear sub-systems, a cross-spectrum technique involving Wiener-Volterra kernels has been applied to identify the linear transfer functions, from which the structural properties and the force transfer parameters have been obtained by a least squares approximation. The developed method provides a versatile and non-iterative approach for dealing with the nonlinear interaction problems encountered in offshore structural engineering. Current studies aim to further establish the versatility and the reliability of this method.

University Of Rochester

Dept of Physics and Astronomy \$69,500
Rochester, NY 14627 06-C
92-3

Flux Flow, Pinning, and Resistive Behavior in Superconducting Networks *S. Teitel*

The fluctuation of vortices and vortex lines has been shown to be a major source of electrical resistance for superconducting networks when placed in magnetic fields. Systems of particular interest include the new high temperature type II superconductors, and periodic arrays of Josephson junctions. Numerical simulations are being carried out to identify and characterize the nature of the various vortex structures present in such systems, as a function of temperature and applied magnetic field, and to understand the nature of the phase transitions between them.

Particular attention has recently been given to studying the equilibrium fluctuation of vortex lines in models of bulk high temperature superconductors.

Simulations have shown that there can be two distinct phase transitions describing the superconducting ordering parallel versus perpendicular to the applied magnetic field. The loss of order in the perpendicular direction has been associated with a melting of the ground state

vortex line lattice. The loss of order in the parallel direction has been associated with the onset of a vortex line tangle percolating throughout the entire system. New simulations, relaxing earlier approximations, are being carried out to clarify this issue. The effect of applied currents and random vortex pinning sites will be added in future work. The dynamic behavior of vortices in two dimensional Josephson arrays has also recently been investigated using a detailed finite size analysis to verify proposed scaling equations.

This research will greatly enhance the fundamental understanding of behavior in strongly fluctuating superconducting materials. The results will have impact in understanding the magnetic properties of the new high temperature superconductors, and in the design of Josephson junction arrays for use as microwave detectors and generators.

University Of Rochester

Dept of Physics and Astronomy \$93,500
Rochester, NY 14627 06-C
93-3

Coherence Effects in Radiative Energy Transfer *E. Wolf*

This research is mainly concerned with the elucidation of the foundations of radiometry and radiative energy transfer and with the influence of source correlations on the energy distribution throughout the radiated field.

In the early stages of these investigations the relationship of radiometry to statistical wave theory for fields produced by a certain class of globally incoherent sources was clarified. The present research is concerned with extending this work to fields generated by sources of a broader class. Frequency shifts in spontaneous emission from two interacting atoms, was also investigated. This effect may be considered to be analogous, in some respects, to the Lamb shift.

The possibility of determining spatial correlation functions of random media from the knowledge of the correlation functions of the scattered field in the far zone is also being studied.

The Rockefeller University

Department of Physics
1230 York Avenue
New York, NY 10021

\$85,487
06-C
92-3

Some Basic Research Problems Related to Energy

E. Cohen

The present project is concerned with the following problems. 1. The investigation of new types of diffusion, discovered in Lorentz lattice gas cellular automata, is continued. In this gas point particles move on a lattice occupied by deterministic scatterers. For randomly placed scatterers this gas can be considered as a dynamical system in a random environment. A beginning has been made to investigate the case of periodically placed scatterers. 2. A relation between the transport coefficients (viscosity, diffusion) of a fluid in a nonequilibrium stationary state and its two maximal Lyapunov exponents is further pursued. This relation is based on the symmetry of the Lyapunov spectrum of the fluid. The class of systems for which this symmetry holds is being investigated. In addition, computer studies are made of the diffusion coefficient of particles in a periodic triangular Lorentz gas in equilibrium. Since this transport coefficient can also be expressed in terms of two Lyapunov exponents, the connection between the two cases is being studied. 3. An analogy has been discovered between the structural relaxation of atomic liquids and monodisperse concentrated colloidal suspensions, consisting of spherical particles. This analogy can be understood via the kinetic theory of a hard sphere model of both fluid systems. Applications to the visco-elastic and rheological behavior of concentrated colloidal suspensions are made providing a microscopic approach to these properties.

Sandia National Laboratories

Combustion Research Facility
Thermofluids Division
Livermore, CA 94550

\$150,000
06-B
90-3

Mixing and Phase Change During Combustion

A. Kerstein

This project involves analytical and computational study of the effect of random advection on two interrelated processes, molecular mixing and front propagation. Some fundamental aspects of advective effects are not well understood even for simple flows involving a limited range of advection length scales. These aspects include the species concentration distribution in statistically steady mixing configurations and, for propagation processes, the dependence of front surface area on stirring intensity. In turbulent flow, involving a wide range of length scales, a key problem is the coupling between flow and mixing in cases for which mixing modifies flow energetics, as in buoyant stratified turbulence.

The methodology employed in this project involves analogies between physical processes subject to random disturbances and stochastic processes. In particular, a novel computational model of turbulent mixing has been formulated in which turbulent stirring is represented by non-linear mappings on a line, iterated according to a stochastic rule that incorporates turbulence scaling laws. Comparisons to experimental results demonstrate substantial gains in predictive capability relative to other methods.

In future work, this and other models will be used to simulate and analyze the effect of random advection, especially turbulent advection, on mixing and propagation processes in combustion and geophysical flows. Propagation processes of interest include flame fronts in fuel-air mixtures and acoustic fronts perturbed by ocean currents.

Sandia National Laboratories

Combustion Research Facility
Livermore, CA 94551-0969

\$ 0
06-B
90-3

**Structure of Inverse Diffusion Flames in
Supercritical Fuel/Water Mixtures**
R. Steeper

This project investigates the structure of diffusion flames in high-density fuel-water-oxidizer mixtures. These *hydrothermal flames* are of practical concern in the development of supercritical water oxidation as a waste destruction process. Yet the basic scientific understanding of such flames is limited. Sandia has built a laboratory-scale, hydrothermal flame reactor with optical access suitable for imaging, laser velocimetry, and Raman spectroscopy diagnostics. Hydrothermal flames created in this facility exhibit characteristics distinct from atmospheric-pressure flames. One unique characteristic of the high-density flames is a wide range of possible flame temperatures; another is an insensitivity of flame height to fuel fraction. The research program investigates this unexpected behavior by performing experiments with densities ranging from atmospheric to supercritical. The program provides an opportunity to extend the basic scientific understanding of diffusion flames by examining the effects of high density and an aqueous environment.

In experiments conducted to date, the range of conditions that leads to the ignition of methane-water-oxygen and methanol-water-oxygen flames has been measured. A future goal of the experiments is to map temperature, species, and velocity fields in the hydrothermal flame reactor. Both analytical and numerical models of laminar diffusion flames are available to support the experimental efforts. These models will be modified to include a supercritical fluid equation of state, an appropriate reaction mechanism, and high-pressure transport properties.

University Of Southern California

Dept of Mechanical Engineering \$106,536
Los Angeles, CA 90089-1453 01-C

91-3

Particle Pressures in Fluidized Beds
C. Campbell

The particle pressure represents the portion of the momentum transport in a fluidized bed that can be attributed to the motion of particles and their interactions. Preliminary measurements, in gas-fluidized beds, have shown that the particle pressures exerted on the side walls are primarily due to the presence of bubbles and that the magnitude of the average particle pressure scale with the bubble size. This work is continuing in a 2-D bed with the goal of trying to measure the particle pressure field around bubbles. These results are very surprising. It was anticipated on beginning this work that the particle pressure field around a bubble would be something like the gas-pressure field in the sense that the particle pressure changes induced by the bubble would be local to the bubble and would disappear far away. Instead, the results show that the largest pressures are observed in the wake behind the bubble. But, instead of being local, the pressures increase as the bubble moves away and reach the maximum when the bubble erupts from the bed. This indicates that the bubble defluidizes the material in its wake; the particle pressures increase in the far wake as more and more defluidized material is piled on top of itself. There is some evidence that the material is refluidizing in the far wake, but that is a very slow process. This observation may have profound implications in chemical processing as their may not be sufficient intermingling of the gas and solid in the large amount of defluidized material in the wake.

Work is also being performed in a liquid fluidized bed to try and understand how particle pressures are generated in the absence of bubbles. These particle pressures are extremely small and required a redesign of the particle pressure transducer. The results show that the particle pressures are a tradeoff between the particle agitation and concentration. Thus, as the fluidizing flow is increased, the particle pressures rise immediately after minimum fluidization due to the increased agitation, reach a maximum and then drop off due to the reduced concentration.

University Of Southern California

Dept of Mechanical and Aerospace Engineering
Los Angeles, CA 90089

\$124,999
01-C
93-3

A Combined Experimental and Numerical Investigation of Multiphase Porous Media Flow Dynamics

T. Maxworthy, E. Meiburg

This investigation of multiphase porous media flows addresses two related issues: Part one of the study deals with the question of the proper interfacial boundary conditions to be applied in the interfacial region between two *miscible* fluids moving in a Hele-Shaw cell or, by analogy, in a porous medium. We hope to accurately determine the characteristics of these interfaces by comparing experiments carried out in a Hele-Shaw cell and a circular tube with numerical calculations of the full problem, based on the Stokes equations. By measuring the amount of viscous fluid left behind during *miscible displacement* by a less viscous fluid, we hope to establish the spatial dependence of the gap-averaged concentration profile as a function of the Peclet number. By comparison with the numerical calculations as well as with *immiscible* displacement results, we will attempt to determine if the process can be described in terms of an effective capillary number, in which the concentration-gradient stresses at the interface zone might, possibly, give rise to an effective surface tension. The Hele-Shaw cell geometry will also be used to study the *stability of miscible interfaces* over a wide range of conditions including the effect of a tangential velocity jump across the interface. In part two of the investigation, we will explore the nonlinear dynamics of *immiscible* displacements under the influence of gravity on the basis of the recent linear stability results.

The apparatus has been built to study *miscible displacement* in circular tube as a function of both Peclet and Atwood numbers. Results show a strong dependence of the flow on the latter parameter. A two-dimensional code has been developed for studying the Peclet number influence on *miscible displacements*. The code is currently being tested.

Southwest Research Institute

6220 Culebra Road
San Antonio, TX 78228-0510

\$99,979
03-B
91-3

Application of Magnetomechanical Hysteresis Modeling to Magnetic Techniques for Monitoring Neutron Embrittlement and Biaxial Stress

M. Sablik

The approach was to study the effects of neutron embrittlement and biaxial stress on signals from various magnetic measurement techniques in steels. The purpose was to determine which procedures have promise for use in monitoring neutron embrittlement and biaxial stress.

For neutron embrittlement, six sets of broken Charpy samples were examined from two reactors. In each set, the samples all corresponded to the same number of full power years, but each sample was positioned slightly differently in the containment capsule and so received a different amount of irradiation. Each set nevertheless was characterized by one value for each embrittlement parameter, regardless of the differing amounts of irradiation. Since a true measure of embrittlement was not available for each sample, the magnetic measurements exhibited a large statistical spread. The best correlation occurred for nonlinear harmonic amplitudes, with R^2 of the order of 0.7 (rather than 1).

On the other hand, guided by magnetomechanical hysteresis modeling, a procedure has been experimentally identified for measurement of the difference $\sigma_2 - \sigma_1$ of two biaxial stresses. Experiment and modeling exhibit agreement thus far in the case where hysteresis parameters are used in stress monitoring. Other magnetic techniques are now being tried for the stress measurement.

Stanford University

Dept of Mechanical Engineering \$175,000
Stanford, CA 94305-3030 01-A
 91-4

Energy Changes in Transforming Solids G. Herrmann, D. Barnett

In solid mechanics defects such as inclusions, holes, cracks, and dislocations may undergo rearrangement as well as changes of size and form. The energy changes associated with such rearrangements provide thermodynamic driving forces which help characterize the response of solids under loads to these "transformations", and it is the determination and calculation of these driving forces which a portion of our research has as its aim. In the past year we have extended our methodology of heterogenization to treat certain problems in 3-D elasticity, plane thermoelasticity, and antiplane piezoelectricity; the results obtained are of significance in the areas of advanced composites and smart materials. In addition the Neutral Action Method we have recently developed has been applied to thermoelasticity, piezoelectricity, and porous media, and has yielded much insight into analyses of defects and fracture in these systems. We have continued to extend the thermodynamic theory of elastic solids prone to damage using a formalism based on the local state approximation.

Another portion of our work has as its objective the development of further understanding of subsonic and supersonic surface waves and of bulk and interfacial waves in anisotropic elastic and piezoelectric media. Such waves can serve as useful probes in the non-destructive evaluation of matter, provided sufficient details about them are well-understood. In the past year we have studied the existence of so-called "spaces of simple reflection" (within which are to be found supersonic surface wave solutions) in media with **no symmetry** (triclinic symmetry). In particular, we have found the extension of the space of simple reflection in the neighborhood of a supersonic one-component Rayleigh wave in such a solid (a space that had eluded earlier investigations), and we are now studying where and how such a space terminates with respect to slowness surfaces. The latter is a delicate computing problem that involves finding

numerically generalized eigenvectors of non-semisimple matrices, which is a non-trivial computational problem. We are also examining reflection and refraction of plane waves in anisotropic bimatials. During the coming year we intend to return to an unresolved problem in dislocation mechanics, namely the determination of equilibrated dislocation distributions in elastic solids under zero applied stresses; this critical problem must be solved if modern micromechanics is to prove capable of studying elastoplastic solids allowing for **unloading**.

Stanford University

Edward L. Ginzton Laboratory \$285,000
Stanford, CA 94305-3030 03-B
 93-3

Optical Techniques for Superconductor and Thin Film Characterization G. Kino

Photothermal measurements are used to study diffusion and fluctuation phenomena in high temperature superconductors. Phase delay measurements yield the thermal diffusion, and measurement of the reflectivity of the probe beam yields a quantity closely related to the specific heat. Measurements have been made in individual crystallites 20-50 micrometers across. Below T_c , the peak value of the diffusion constant within a grain is much higher than in other measurements, and it is in good agreement with theory. Above T_c , a very large temperature drop is observed across grain boundaries in YBCO, indicating phonon reflection at the grain boundary; we also observe a diffusion constant within an individual crystallite of twice the normally measured bulk value. Diffusion measurements below T_c in YBCO show good agreement with experiments on measurements of normal electron density as a function of temperature. The amplitude of the probing signal yields a quantity closely related to the specific heat. In YBCO and $\text{Bi}_2\text{Sr}_2\text{CaCu}_2\text{O}_8$, measurements show a large peak at T_c and a rapid fall-off from the peak value, in excellent agreement with the second order phase transition theory for fluctuations near the critical point. Similar measurements of charge density waves in NbSe_2 give good agreement with two-dimensional phase transition theory.

Stanford University

**Dept of Civil Engineering
Stanford, CA 94305-4020**

**\$ 0
01-B
90-3**

Fluid Dynamics of Double Diffusive Systems

J. Koseff, R. Street, S. Schladow

A study of mixing processes in doubly diffusive systems is being Conducted. Continuous gradients of two diffusing Components (heat and salinity in our case) are being used as initial conditions, and forcing is introduced by lateral heating and grid stirring. The goals of the proposed work include: (1) quantification of the effects of finite amplitude disturbances on stable, double diffusive systems, particularly with respect to lateral heating, (2) understanding the role of Prandtl/Schmidt number on the mixing efficiency, evolution, and structure of turbulence in a stratified fluid, and (3) increasing our knowledge-base on turbulent flow in stratified environments and how to represent it. The work is being carried out in an experimental facility which is located in the Stanford Environmental Fluid Mechanics Laboratory. Our current research ideas are centered around the fact that while fluids are stirred by turbulence they are not mixed until molecular diffusion occurs. By stretching and folding surfaces of constant concentration and reducing the distance between them the turbulence sharpens the gradients and increases the diffusive flux. Thus turbulence enhances mixing but only molecular diffusion can perform the actual mixing. The research we are planning includes defining a parameter that measures efficiency of mixing and not just stirring, developing linear theory and extending a time scale analysis to predict the effects of molecular diffusion on mixing efficiency, and measuring the efficiency over a range of stratifications in a system stratified by salt, heat, and/or both.

Stanford University

**Mechanical Engineering Dept
Stanford, CA 94305**

**\$441,508
03-B
92-4**

Advanced Diagnostics for Plasma Chemistry

C. Kruger, T. Owano

This research is concerned with optical diagnostics for plasma chemistry and plasma processing, with an emphasis on methods that allow for departures from local thermodynamic equilibrium -- such as

finite chemical reaction rates, nonequilibrium electron densities and temperatures, and radiation loss effects. Advanced laser based methods are being developed for measurement of plasma parameters including species concentration and temperature. The primary technique under study is the application of degenerate four-wave mixing (DFWM) to atmospheric pressure plasma environments in order to assess the importance of nonequilibrium effects under conditions of interest to plasma chemistry.

Results with an induction plasma facility show significant nonequilibrium within a downstream quartz test section, and suggest errors in conventional diagnostics assuming local thermodynamic equilibrium. Measurements of radiation source strength in argon indicate an order-of-magnitude difference from values reported earlier at temperatures of interest in plasma processing.

To investigate the application of advanced laser diagnostics to a realistic and promising form of plasma processing, experiments have been undertaken on the reacting plasma boundary layer of a substrate placed in a diamond producing plasma flow. Growth rate of diamond films in these environments has been demonstrated to be over an order of magnitude greater than those characteristic of low-pressure diamond synthesis systems.

Recent experiments using DFWM to probe CH and C₂ within the reacting plasma have demonstrated the ability to provide sensitive (ppm level) detection with submillimeter spatial resolution in the measurement of vibrational temperatures, rotational temperatures, and species concentrations.

Stanford University

**Dept of Chemistry
Stanford, CA 94305**

**\$194,828
06-C
92-3**

Thermodynamics and Stochastic Theory of Hydrodynamics and Power Producing Processes

J. Ross

Research focuses on the thermodynamic and stochastic theory of hydrodynamic processes, such as combinations of chemical reactions, diffusion,

thermal conduction, and viscous flow. Such theories have been formulated for each of the individual processes, both Linear and nonlinear. Progress has been made on combinations of these processes for a simplified form of the Navier-Stokes equations, the so-called Lorenz equations. The theory leads to a formulation of an excess work expressed in terms of thermodynamic functions, which provides a Liapunov function, necessary and sufficient conditions of stability, criteria of relative stability, and relations to fluctuations. Concurrent Research is done on systems with multiple stationary states and limit cycles. Work is planned on the formulation of thermodynamics of nonlinear (autocatalytic) chemical reactions which produce work or on which external work is done; and a similar formulation for systems with more than one temperature.

Stanford University

Dept of Chemistry **\$95,328**
 Stanford, CA 94305 **03-A**
92-4

Degenerate Four-Wave Mixing as a Diagnostic of Plasma Chemistry R. Zare

This research project concerns the development of degenerate four-wave mixing (DFWM) for *in situ* diagnostics of the boundary-layer region in atmospheric-pressure reactive plasmas. The emphasis is on nonintrusive and state-specific techniques for monitoring the concentration, temperature and spatial distribution of transient radical species during plasma processing. DFWM is a highly sensitive laser-based nonlinear spectroscopy yielding a coherent signal beam that can be detected remotely, free from the interferences of background luminescence.

Recent experiments using DFWM to probe CH and C₂ during the plasma synthesis of diamond thin films have demonstrated the ability to provide parts-per-million-level detection with submillimeter spatial resolution in the measurement of rotational temperatures, vibrational temperatures, and species concentration. These experiments are conducted in an industrial-scale 50 kW inductive plasma reactor operating with argon, hydrogen and methane. The critical region is a narrow (less than 1 cm thick) boundary layer at the gas-surface

interface. The CH temperature is found to fall monotonically from nearly 4000 K in the free-stream to 1200 K at the surface. Simultaneously the mole fraction of CH and C₂ rises and falls, with a maximum 200 microns above the surface. Excellent agreement is found between measured profiles and those predicted with a one-dimension computational model.

Stevens Institute Of Technology
 Dept of Physics and Engineering **\$67,000**
 Hoboken, NJ 07030 **06-C**
92-3

Investigation of Transitions From Order to Chaos in Dynamical Systems G. Schmidt, A. Chernikov

Basic properties and applications of chaotic dynamical systems are studied, analytically as well as computationally.

1. A fast dynamo is a highly conductive fluid in stationary chaotic motion that enhances a small seed magnetic field exponentially. It has been conjectured that solar and stellar magnetic fields are generated by such a process. Recently we have identified the first realistic candidate for fast dynamo action. A convective cell (fluid heated from below) has been studied analytically and computationally, and exponential growth of a seed magnetic field over several orders of magnitude has been detected on the computer model. A new numerical scheme, the fractal grid method, has been developed to measure the magnetic flux reliably. In this model the fluid had infinite conductivity. To measure the effect of finite (but very large) conductivity a new numerical method has been developed, and future work will concentrate on the computation of this model with finite conductivity. One expects a slower flux growth with this more realistic model, and the aim is to find the growth rate as a function of conductivity.

2. Charged particle beams are often afflicted by a process called emittance growth, reducing beam quality. We intend to study this process on the basis of chaotic motion of beam particles. Cylindrical beams will be studied, moving in a confining field as well as the self consistent field produced by the charged particles. Preliminary studies indicate emittance growth due to chaotic effects once cylindrical sheets cross.

Texas A&M University

Petroleum Engineering \$143,257
College Station, TX 77843 06-C
93-2

Hydrocarbon/CO₂/Water Multiphase
Equilibrium Separations
C. Wu

The objectives of this research project are: (1) conducting experimental measurements of phase equilibria for mixtures of selected hydrocarbons with CO₂ and water at pressures up to 10,000 psia and at temperatures up to 500°F and (2) developing a rigorous computer simulator (EOSS) using the Wong-Sandler mixture combining rules and "Area Method" for laboratory data analysis and general applications.

Two existing laboratory apparatus will be modified for the experimental work. A high-pressure mercury-free window cell will be upgraded to conduct the laboratory experiments to 400°F. A high-temperature distillation cell will be modified for experimental tests to 500°F. The experiments will use n-alkanes having carbon numbers from C₁ to C₁₂, naphthenes and aromatics, CO₂ and crude oils. Sufficient basic laboratory data will be collected and analyzed to determine three-phase K-Values and phase properties using empirical correlations and the rigorous equation of state approach.

Existing phase-behavior computer simulators will be upgraded concurrently with the experimental work to describe the multiphase equilibrium separations. multiphase computer simulators will be verified with the experimental data for practical applications in compositional reservoir engineering and enhanced oil recovery, and for process design and chemical separation in chemical industry.

University Of Texas At Austin

Ctr for Studies in Statistical Mech \$100,003
and Complex Systems 06-C
Austin, TX 78712 91-3

The Behavior of Matter Under Non-
Equilibrium Conditions: Fundamental
Aspects and Applications
I. Prigogine, T. Petrosky

A significant development has been achieved in the fundamental aspects of non-equilibrium

dynamics. For unstable dynamical systems, there are different classes; this includes dynamical maps. Recent work by this group shows that the evolution operator of the probability distribution admits an irreducible spectral representation with complex eigenvalues related to the Lyapounov exponents. This representation is in generalized spaces (so-called "rigged" Hilbert spaces). The eigenfunctions are distributions (which are, in general, fractals) that have to be used in conjunction with test functions. This excludes the consideration of individual trajectories and implies therefore an irreducible statistical description. The existence of such irreducible representation can be considered as the very definition of chaos.

These representations also can be constructed for an important class of classical and quantum systems, called "Large Poincare Systems" (LPS), characterized by a continuous set of resonances. Most systems in nature are LPS. As a simple example, potential scatterings have been studied in detail. It has been shown that the usual spectral representations of the Hamiltonian or of the Liouville operator fail for persistent scattering; moreover, these are the first examples that show the limit of trajectory dynamics in classical systems and also the limit of quantum mechanics based on wave functions. The results have been verified by numerical simulations. For the persistent scattering, new spectral representation that is irreducible has been constructed in generalized spaces (it cannot be expressed in terms of wave functions). This representation incorporates into dynamics dissipativity, as well as approach to equilibrium.

Several applications of the new spectral representation are in progress. These are matter-field coupled systems (quantum optics), field-field coupled systems, evaluation of genuine three-body scattering cross section, causal behavior of the Lorentz gas, and so on.

University Of Texas At Austin

Dept of Physics \$182,883
Austin, TX 78712 06-C
93-5

Complex Spatiotemporal Patterns in
Nonequilibrium Systems
H. Swinney

The formation and evolution of spatiotemporal patterns is being studied in chemical and physical

pilot scale equipment in the laboratory. These experiments not only allow improvements in theoretical work, but also represent real life demonstrations of the effectiveness of the methods and of the feasibility of implementing them in an industrial environment. The new techniques developed in this project will be incorporated into computer-aided design packages and disseminated to industry. Therefore, it is expected that the work will have an impact on industrial practice.



Budget Number Index

Mechanical Sciences:

- 01-A Solid Mechanics: macroscopic aspects of elastic and plastic deformations, and crack propagation
- 01-B Heat Transfer
- 01-C Fluid Mechanics
- 01-D Tribology

Control Systems and Instrumentation:

- 03-A Control systems, large scale systems
- 03-B Instrumentation for hostile environment, and NDE
- 03-C Intelligent systems

Engineering Data and Analysis:

- 06-A Thermophysical properties and processes
- 06-B Combustion
- 06-C Non-linear dynamics and engineering analysis

**Budget
Number**

**Page
Number**

01-A

Chaos in Fluid-Structure Systems	1
Bounds on Dynamic Plastic Deformation	2
Continuum Damage Mechanics - Critical States	3
An Investigation of History Dependent Damage in Time Dependent Fracture Mechanics	3
A Micromechanical Viscoplastic Stress-Strain Model with Grain Boundary Sliding . .	13
Chaos in Fluid-Structure Systems	14
Elastic-Plastic Fracture Analysis Emphasis on Surface Flaws	18
Stress Induced Phase Transformations	20
Modeling and Analysis of Surface Cracks	27
Basic Engineering Sciences of Solids Comminution	28
Inelastic Deformation and Damage at High Temperature	42
Stochastic Quadrization for Probabilistic Analysis of Large Compliant Off-Shore Structures	43
Structure and Modelling of the Three-Dimensional Boundary Layers on a Rotating Disk	48
Stability and Stress Analyses of Surface Morphology of Elastic and Piezoelectric Materials	48
Energy Changes in Transforming Solids	49
Effective Elastic Properties and Constitutive Equations for Brittle Solids Under Compression	53

01-B

Film Cooling in a Pulsating Stream	2
Thermal Radiation and Conduction in Microscale Structures	4
Heat Transfer to Viscoelastic Fluids	20
Stability and Rupture of Thin Fluid Films on Heated Solid Surfaces	34
Radiative Transfer Through an Array of Discrete Surfaces	37
Radiative Transfer Through Arrays of Discrete Surfaces with Fixed Orientation	38
Near-Wall Measurement of Sublayer Dryout and Theoretical Modeling of CHF in Vertical Channels	42
Ultimate Limits of Boiling Heat Fluxes	42
Fluid Dynamics of Double Diffusive Systems	50
Mass and Energy Coupling Effects in Multiphase Free Shear Flows	54

01-C

Hydrodynamic Instabilities and Coherent Structures	1
Basic Studies of Transport Processes in Porous Media	5
Turbulence Structure and Transport Processes in Wavy Liquid Streams	9
Lift and Drag Forces on Droplets and Particles in Wall-Bounded Flows	13
Experiments in Turbulent Mixing	15
Two-Phase Potential Flow	16
Experimental and Analytical Investigations of Flows in Porous Media	16
Gas-Liquid Flow in Pipelines	20
Numerical and Physical Modelling of Two-Phase Flow Phenomena at Large Reynolds Numbers	21
Turbulence Theory	21
Lagrangian Analysis of Contaminant Dispersal in Bounded Turbulent Shear Flows . .	24
Stability and Heat Transfer in Time-Modulated Flows	25
Rheological and Flow Characteristics of Dense Multiphase Slurries Employing a Bimodal Model	28
Lubricated Transport of Viscous Materials	29
Effects of Capillarity of Macroscopic Flow in Porous Media	34
Wave Dynamics on Falling Films and Its Effects on Heat/Mass Transfer	35
Study of Interfacial Behavior in Cocurrent Gas-Liquid Flows	36
Active Control of Convection	38
Effect of Forced and Natural Convection on Solidification of Binary Mixtures	41
Interfacial Area and Interfacial Transfer in Two-Phase Flow	41
Development and Use of Image Scanning Ellipsometer to Study the Dynamics of Heat Thin Liquid Films	43
Particle Pressures in Fluidized Beds	46
A Combined Experimental and Numerical Investigation of Multiphase Porous Media Flow Dynamics	47
Interfacial Area and Interfacial Transfer in Two-Phase Flow Systems	55

01-D

Characterization of Metal Cutting Dynamics	22
Cryotribology (Low Temperature Friction and Wear) Development of Cryotribological Theories and Application to Cryogenic Devices	27

03-A

Modeling for Process Control	10
Integration of Redesign Methodologies for Chemical Processes	10
Application of Intelligent Control Systems to Mixed-Culture Bioprocesses	17
Intelligent Control of Thermal Processes	19
Model Building, Control and Optimization of Large Scale Systems	19
A General Procedure for the Synthesis of Process Flowsheets	25
Synthesis and Optimization of Integrated Chemical Processes	26
Partial Control of Complex Processing Systems	32
Degenerate Four-Wave Mixing as a Diagnostic of Plasma Chemistry	51

03-A

Investigation Of PACVD Protective Coating Processes Using Advanced Diagnostic Techniques	53
Visually Guided Control Systems: A New Generation of System Analysis and Design	54
New Process Modeling, Design and Control Strategies for Energy Efficiency, High Product Quality, and Improved Productivity in the Process Industries	55

03-B

Nondestructive Evaluation of Superconductors	19
Two-Phase Flow Measurements by NMR	22
Pulse Propagation in Inhomogeneous Optical Waveguides	23
Metal Transfer in Gas Metal Arc Welding	26
Multivariable Control Of The Gas-Metal Arc Welding Process	26
Development of Measurement Capabilities for the Thermophysical Properties of Energy-Related Fluids	31
Thin-Film Characterization and Flow Detection	33
Application of Magnetomechanical Hysteresis Modeling to Magnetic Techniques for Monitoring Neutron Embrittlement and Biaxial Stress	47
Optical Techniques for Superconductor and Thin Film Characterization	49
Advanced Diagnostics For Plasma Chemistry	50

03-C

Research on a Reconfigurable and Reliable Manipulators	11
The Mechanics of Redundantly Driven Robotic Systems	24
Center for Engineering Systems Advanced Research (CESAR)	36

06-A

Three Phase System Modelling	16
In-Flight Measurement of the Temperature of Small, High Velocity Particles	17
Modeling of Thermal Plasma Processes	18
Experimental and Theoretical Studies of Multicomponent Vapor Condensation	39
Transport Properties Of Disordered Porous Media From The Microstructure	40

06-B

Fundamental Studies of Spray Combustion	6
Experiments on the Gas Dynamics of the HVOF Thermal Spray Process	39
Mechanisms and Enhancements of Flame Stabilization	40
Mixing and Phase Change During Combustion	45
Structure of Inverse Diffusion Flames in Supercritical Fuel/Water Mixtures	46

06-C

Dynamics of Electronegative Plasmas for Materials Processing	4
Linear Kinetic Theory and Particle Transport in Stochastic Mixtures	5
Nonlinear Waves in Continuous Media	6
Nonperiodic, Broadband Signals: Signal Processing in Chaos	6
Noisy Nonlinear Systems	7
Knot Invariants and the Thermodynamics of Lattice Gas Automata	7
Structure of Turbulence, Conditional Averaging and Subgrid-Scale Modeling	8
Traveling-Wave Convection in Fluid Mixtures	8
Bifurcations and Patterns in Nonlinear Dissipative Systems	9
Finite-Time Thermodynamics and Effective Energy Use	12
Fundamentals and Techniques of Nonimaging Optics	12
Mixing and Settling in Continuous Metal Production	15
Studies in Nonlinear Dynamics	22
Mathematical Models of Hysteresis	23
Macrostatistical Hydrodynamics	29
Thermal Plasma Processing of Materials	30
Department of Energy Integrated Manufacturing Fellowship Program	30
Industrial Liaison Pilot Program	31
Low Resistivity Ohmic Contacts Between Semiconductors and High-Tc Superconductors	32
The Rheology of Concentrated Suspensions	32
Studies in Premixed Combustion	33
Mixing of Immiscible Fluids in Chaotic Flows and Related Issues	34
Stability and Dynamics of Spatio-Temporal Structures	35
Turbulence and Spatio-Temporal Chaos	36
The Evolution of a Hele-Shaw Interface and Related Problems in Dendritic Crystal Growth	37
The Continuum Modeling of Two-Phase Systems	43
Flux Flow, Pinning, and Resistive Behavior in Superconducting Networks	44
Coherence Effects in Radiative Energy Transfer	44
Some Basic Research Problems Related to Energy	45
Thermodynamics and Stochastic Theory of Hydrodynamics and Power Producing Processes	50
Investigation of Transitions From Order to Chaos in Dynamical Systems	51
Hydrocarbon/CO ₂ /Water Multiphase Equilibrium Separations	52
The Behavior of Matter Under Nonequilibrium Conditions: Fundamental Aspects and Applications	52
Complex Spatiotemporal Patterns in Nonequilibrium Systems	52

Principal Investigators

H. Abarbanel	6	B. Ghosh	54	K. Lindenberg	7	S. Schladow	50
J. Achenbach	33	A. Graham	29	R. Littlejohn	22	G. Schmidt	51
A. Acrivos	32	L. Gratton	5	M. Malone	25	H. Sehitoglu	20
G. Ahlers	9	I. Grossmann	10	R. Mann	36	J. Sengers	31
S. Altobelli	22	T. Hanratty	20	T. Maxworthy	47	G. Settles	39
G. Andrews	16,17	D. Hardt	26	I. Mayergoyz	23	J. Sheridan	31
J. Balint	24	J. Hartnett	20	F. McClintock	27,28	R. Shinnar	32
S. Banerjee	9	S. Hay	53	M. McCready	36	G. Sivashinsky	33
S. Bankoff	34	W. Haynes	31	J. McLaughlin	13	H. Smartt	19
D. Barnett	49	F. Hayot	36	E. Meiburg	47	P. Spanos	43
P. Barton	26	J. Heberlein	30	C. Menyuk	23	R. Steeper	46
T. Basar	19	G. Herrmann	49	D. Meyer	7	D. Stoner	17
H. Bau	38	G. Hetsroni	9	M. Miksis	34	R. Street	50
R. Behringer	16	F. Incropera	41	I. Minis	22	C. Surko	8
B. Berger	22	M. Ishii	41	M. Moldover	31	H. Swinney	52
A. Bergles	42	Y. Iwasa	27	L. Mondy	29	S. Tanveer	37
P. Bernard	24	C. Jayaprakash	36	F. Moon	14	S. Teitel	44
S. Berry	12	M. Jensen	42	M. Morari	10	K. Telschow	19
L. Biegler	10	J. Johnson	17,19	J. Moreland	32	C. Thompson	25
H. Brenner	29	E. Jordan	13	I. Mudawar	42	G. Thompson	10
F. Brust, Jr.	3	D. Joseph	29	E. Novikov	8	C.-L. Tien	4
C. Campbell	46	M. Kachanov	53	F. Otter	53	S. Torquato	40
D. Cannell	9	T. Kanade	11	J. Ottino	34	V. Travkin	5
A. Caprihan	22	A. Kaufman	22	T. Owano	50	T. Troutt	54
I. Catton	5	R. Kayser	31	D. Parks	27	L. Tsai	24
C. Chang	18	A. Kerstein	45	C. Peterson	28	K. Walker	13
H.-C. Chang	35	P. Khosla	11	T. Petrosky	52	J. Wallace	24
S. Chen	1	G. Kino	49	E. Pfender	30	G. Wallis	16
A. Chernikov	51	G. Kojasoy	55	F. Pin	36	Z. Warhaft	15
E. Cohen	45	P. Kokotovic	19	G. Pomraning	5	P. Wayner, Jr.	43
S. Davis	34	J. Koseff	50	I. Prigogine	52	J. Welty	37
J. Douglas	25	R. Kraichnan	21	R. Probststein	28	A. Westerberg	10
D. Drew	43	D. Krajcinovic	3	A. Prosperetti	21	G. Wilemski	39
M. Drost	38	E. Krempf	42	S. Putterman	6	F. Williams	6
T. Eagar	26	C. Kruger	50	J. Ramshaw	18	R. Winston	12
J. Eaton	48	B. Kuhn	30	W. Ray	55	E. Wolf	44
A. Eckbreth	53	H. Kytomaa	28	W. Reuter	18	C. Wu	52
J. Ekin	32	R. Lahey, Jr.	43	H. Richter	15	I. Wygnanski	2
L. Evans	26	J. Lang	26	H. Riecke	35	B. Wyslouzil	39
J. Fincke	17	C. Law	40	I. Rinard	32	C. Youngdahl	2
A. Frenkel	1	P. Libby	6	W. Roman	53	R. Zare	51
E. Fukushima	22	A. Lichtenberg	4	J. Ross	50		
H. Gao	48	M. Lieberman	4	M. Sablik	47		

UNITED STATES DEPARTMENT OF ENERGY

WASHINGTON, DC 20585

**OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE, \$300**

FIRST-CLASS MAIL
POSTAGE & FEES PAID
U.S. DEPT. OF ENERGY
PERMIT NO. G20