

# Isotope Production Using a Superconducting Electron Linac

**Terry L. Grimm, Jerry L. Hollister, Stephen A. Klass,  
Erik S. Maddock, Mark P. Sinila, Valeriia N. Starovoitova**  
*Niowave, Inc.*  
*Lansing MI*

DOE-NP SBIR/STTR Exchange Meeting, Gaithersburg MD  
August 2014



**NIOWAVE**  
[www.niowaveinc.com](http://www.niowaveinc.com)



# Outline

- Key personnel
- Superconducting electron linacs & their applications
- Photonuclear isotope production
  - Research isotopes (DOE Isotope Program)
  - Mo-99 (commercial market)
- Mo-99 production rates
- Mo-99 recovery
- NRC & state licenses
- Niowave headquarters – prototype & commission
- Niowave airport facility – production & distribution



# Key Personnel



## **Dr. Terry Grimm**

President & Senior Scientist

- PhD Nuclear Engineering, MIT
- Founded Niowave in 2005
- Over 25 years experience in superconducting accelerators



## **Dr. Valeriia Starovoitova**

Nuclear Physicist

- PhD Nuclear Physics, Purdue
- Researcher at Idaho Accelerator Center
- Over 10 years experience in nuclear physics



## **Erik Maddock**

Nuclear Engineer

- MS Radiological Physics, Wayne State
- Niowave Radiation Safety Officer
- US Navy Nuclear Power School



## **Jerry Hollister**

Chief Operating Officer

- BS Engineering, Univ of Michigan
- Former Naval Officer & Warranted Contracting Officer



## **Mark Sinila**

Chief Financial Officer

- BS Business Admin, Albion
- Over 20 years experience in business administration



## **Steve Klass**

Director of Manufacturing

- BS Engineering, Saginaw Valley
- Over 20 years experience in manufacturing at General Motors



# Why Superconducting?

- $10^6$  lower surface resistance than copper
  - Most RF power goes to electron beam
  - CW/continuous operation at relatively high accelerating gradients  $>10$  MV/m
- Large aperture resonant cavities
  - Improved wake-fields and higher order mode spectrum
  - Preserve high brightness beam at high average current (high power)




# Commercial Uses of Superconducting Electron Linacs




High Power X-Ray Sources



Radioisotope Production

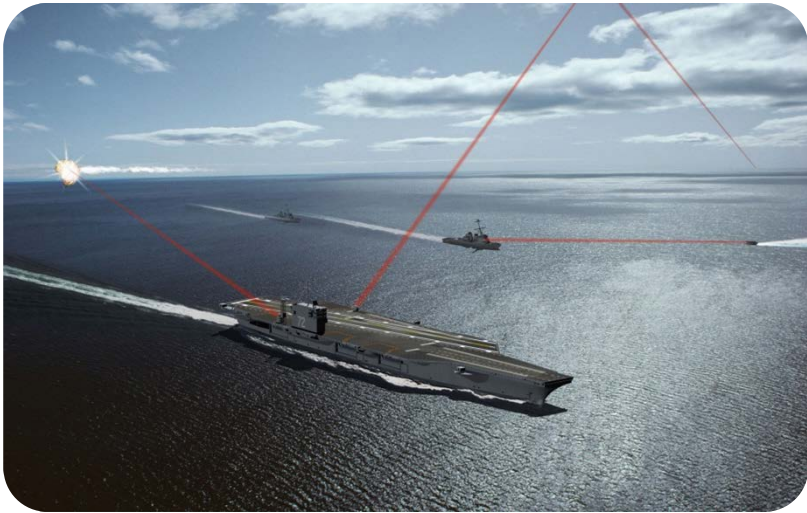


Free Electron Lasers

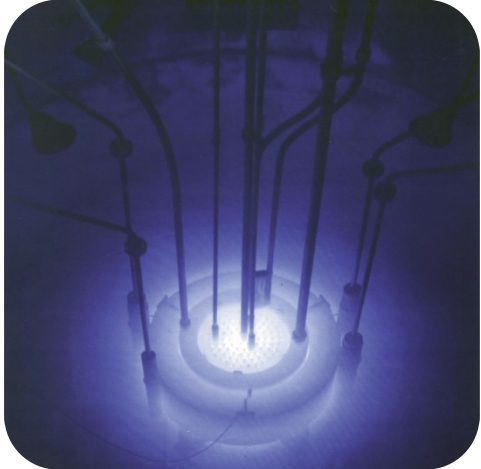

High Flux Neutron Sources



# Superconducting Turnkey Electron Linacs

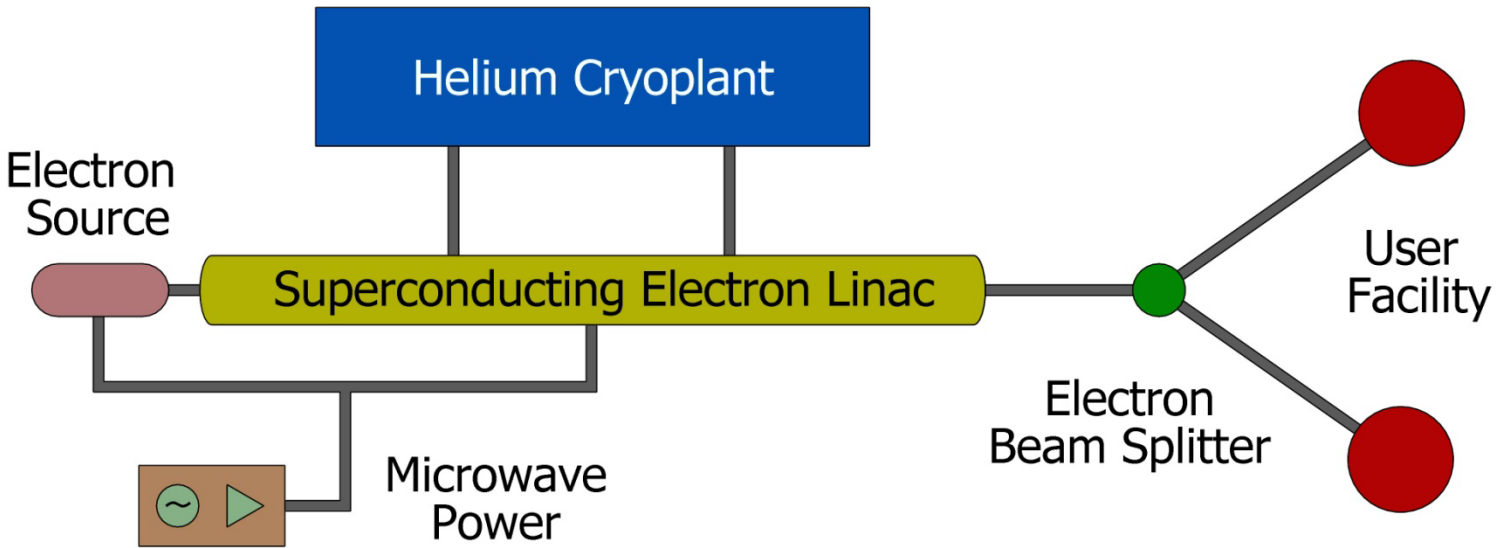

## Turn-key Systems


- Superconducting Linac
- Helium Cryoplat
- Microwave Power
- Licensing

<b>Electron Beam Energy</b>	<b>0.5 – 40 MeV</b>
<b>Electron Beam Power</b>	<b>1 W – 100 kW</b>
<b>Electron Bunch Length</b>	<b>~5 ps</b>






# Turnkey Linac Subsystems

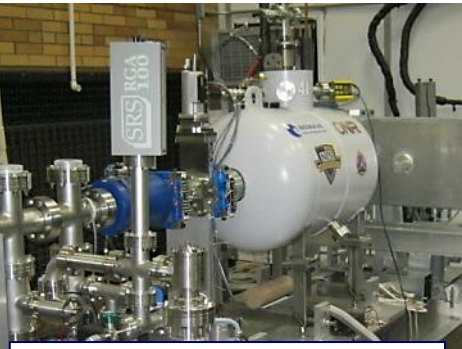

RF electron guns



Solid-state and  
tetrode RF  
amplifiers  
(up to 60 kW)

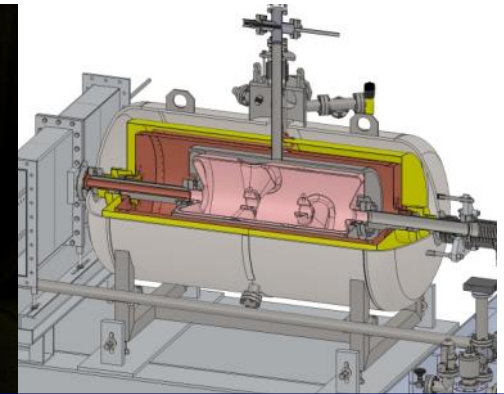

Superconducting cavities and cryomodules



High-power  
couplers



Commercial 4 K refrigerators  
(rugged piston-based systems,  
100 W cryogenic capacity)



# Superconducting Accelerating Cavities


multi-cell elliptical



multi-spoke



quarter-wave

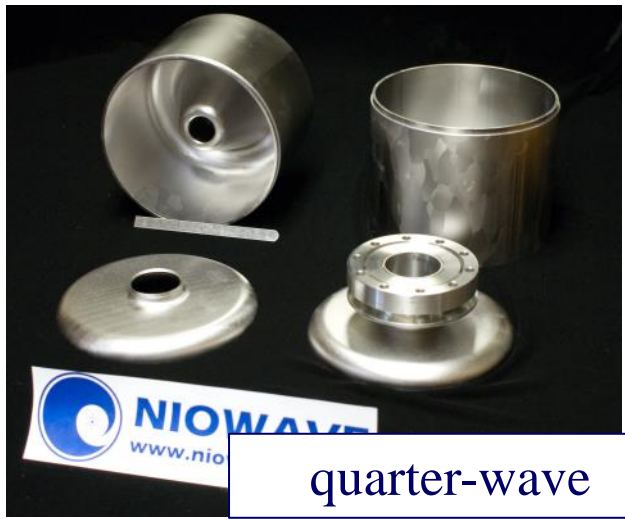

Variety of new SRF cavity shapes are allowing compact, low-frequency acceleration with high average beam power.

photonic bandgap







- Superconducting linacs have inherent losses due to the time varying fields

frequency  $\rightarrow$

$$R_{BCS} \propto f^2 \exp\left(-\frac{T_c}{T}\right)$$

superconducting transition temperature  $\rightarrow$

operating temperature  $\rightarrow$

- For commercial electron linacs the minimum costs for a system occur around:
  - 300-350 MHz (multi-spoke structures)
  - 4.5 K (>1 atmosphere liquid helium)



# Superconducting Multi-Spoke Cavities

- Advantages for low frequency, high current linacs
  - **Mechanical stability** (stable against microphonics)
  - **Compact geometry** for improved real-estate gradient and low-frequency operation at 4 K
  - **Improved higher-order-mode (HOM) spectrum** and damping





# RF Power Sources

- Solid-state supplies to 5 kW
- Tetrode amplifier to 60 kW
- IOTs to 90 kW
- Klystrons to >1 MW


inductive output tube



tetrode




solid-state

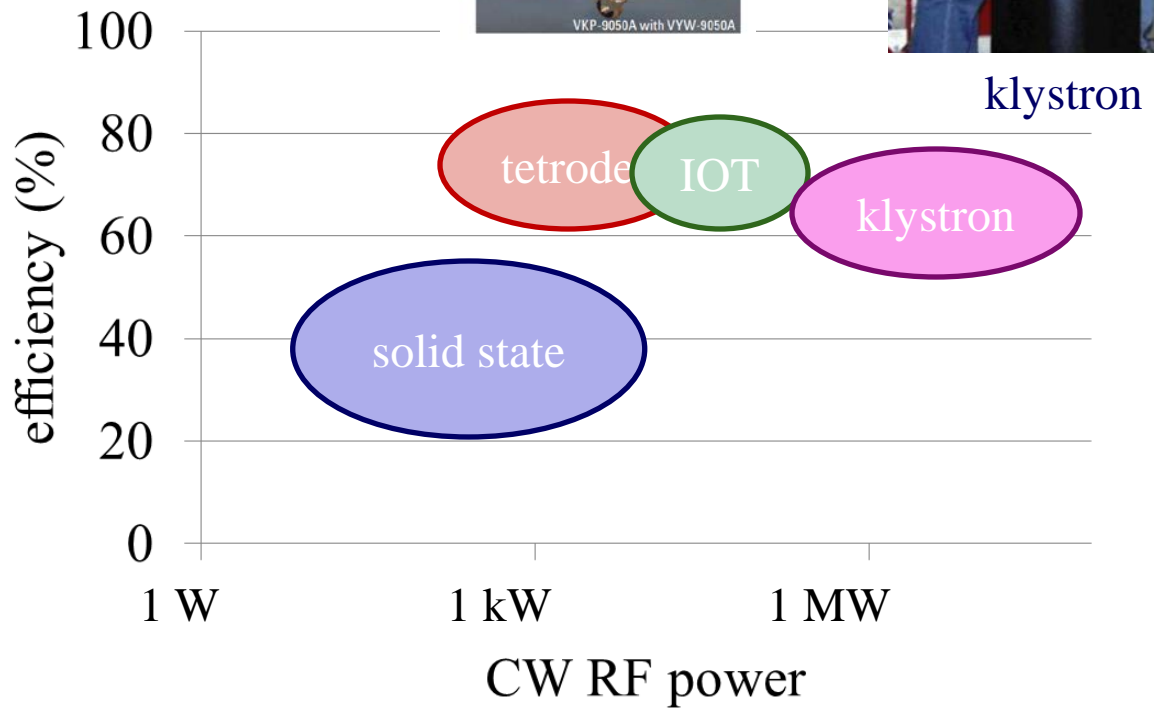




# Commercial 4 K Refrigerators

- Cryo-cooler to 5 W
  - 4.5 K operation
  - 5 kW electrical power
- Commercial refrigerator to 110 W
  - 4.5 K operation (slightly above 1 atm)
  - total electrical power 100 kW
  - higher capacity units available

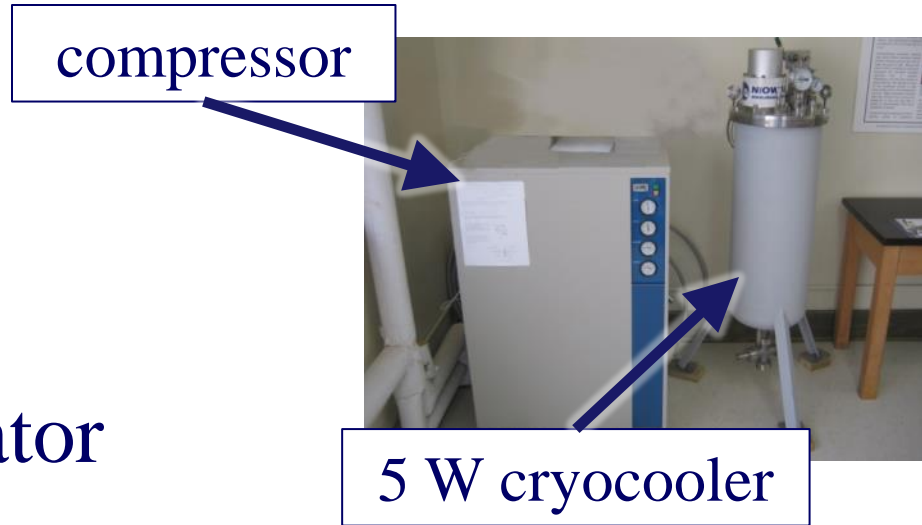



# 2 & 10 MeV Injectors

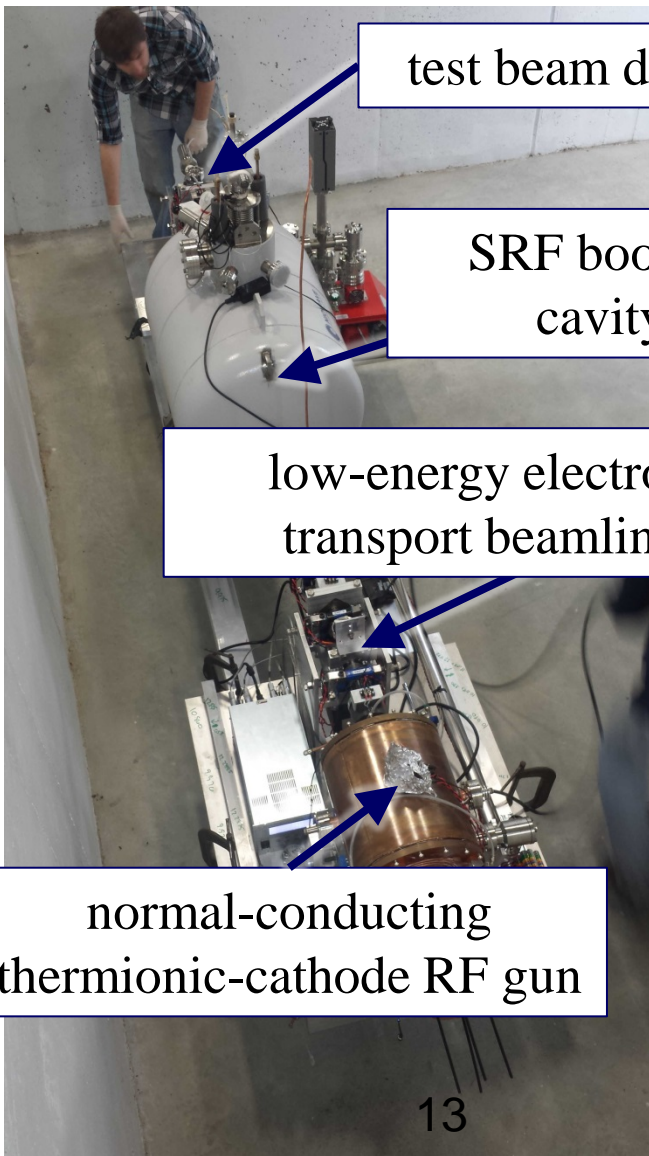



Parameter	2 MeV	10 MeV
cathode type	thermionic	thermionic
NCRF electron gun energy	100 keV	100 keV
SRF booster cavity energy	2 MeV	10 MeV
bunch repetition rate (gun, booster frequency)	350 MHz	350 MHz
transverse normalized rms emittance	3-5 mm mrad	3-5 mm mrad
bunch length @ 2 MeV	2-5 ps	2-5 ps
average beam current	2 mA	1-2 mA





## Bremsstrahlung Converter:



- High conversion efficiency (high Z)
- High melting point, if the converter is solid
- Low melting point and good thermomechanical properties (e.g., swelling, ductility loss, creep rates, etc.), if the converter is liquid
- Optimum thickness depends on electron energy and material

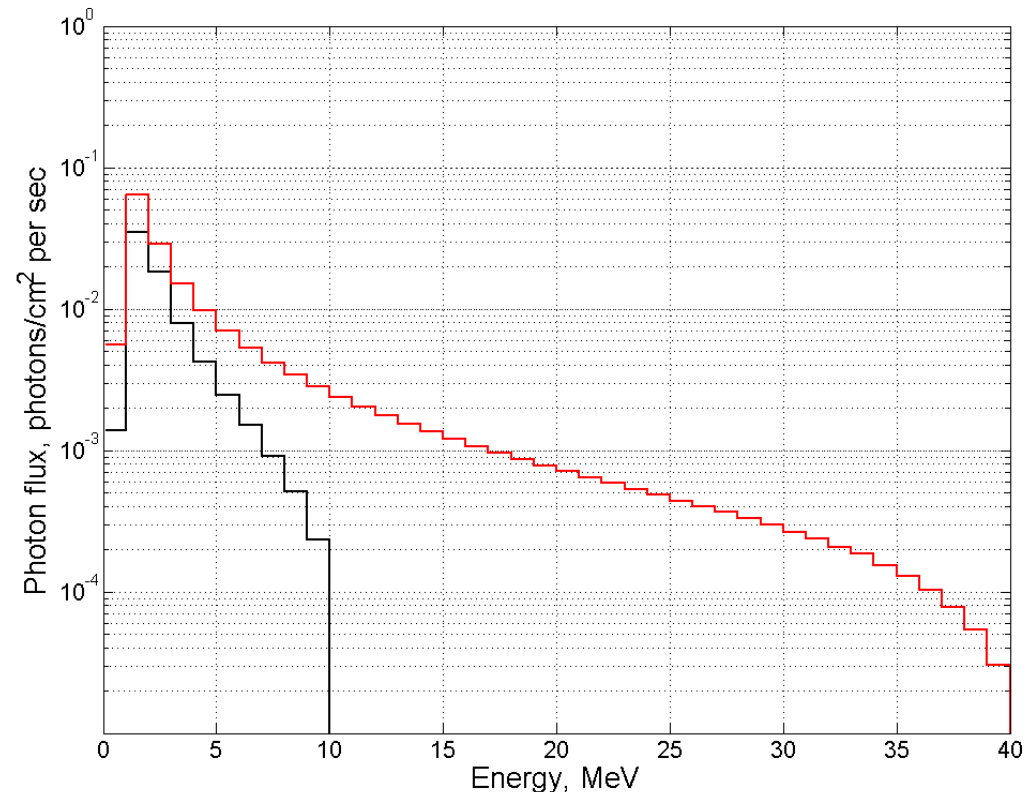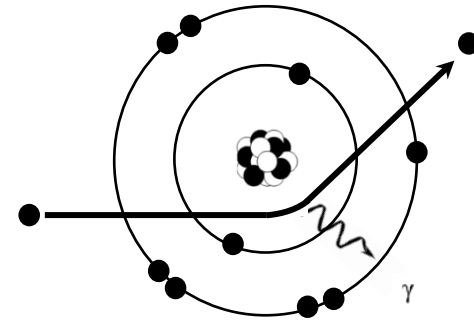



## Lead-Bismuth Eutectic (LBE)

- Low melting point:  
124°C
- High boiling point:  
1670°C
- $Z=82,83$

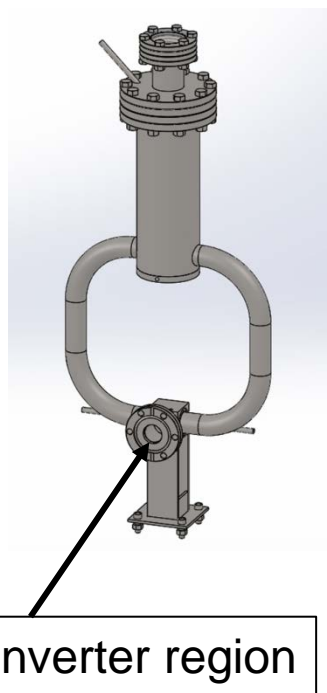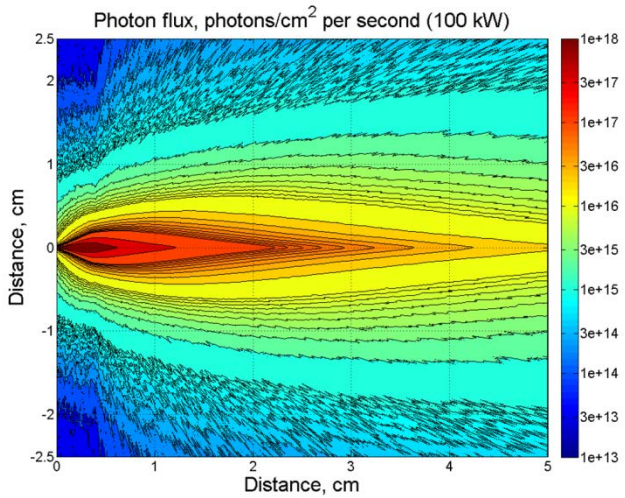

Electron beam




*40 MeV, 1 kW test (2013)*




- Photonuclear production of medical, industrial, and research isotopes for DOE Isotope Program
  - $(\gamma, n)$
  - $(\gamma, p)$
  - $(n, \gamma)$
- Mo-99 production from LEU - domestic facilities which do not rely on using highly enriched uranium
  - $(\gamma, \text{fission})$
  - $(n, \text{fission})$



# Photo-production of Isotopes

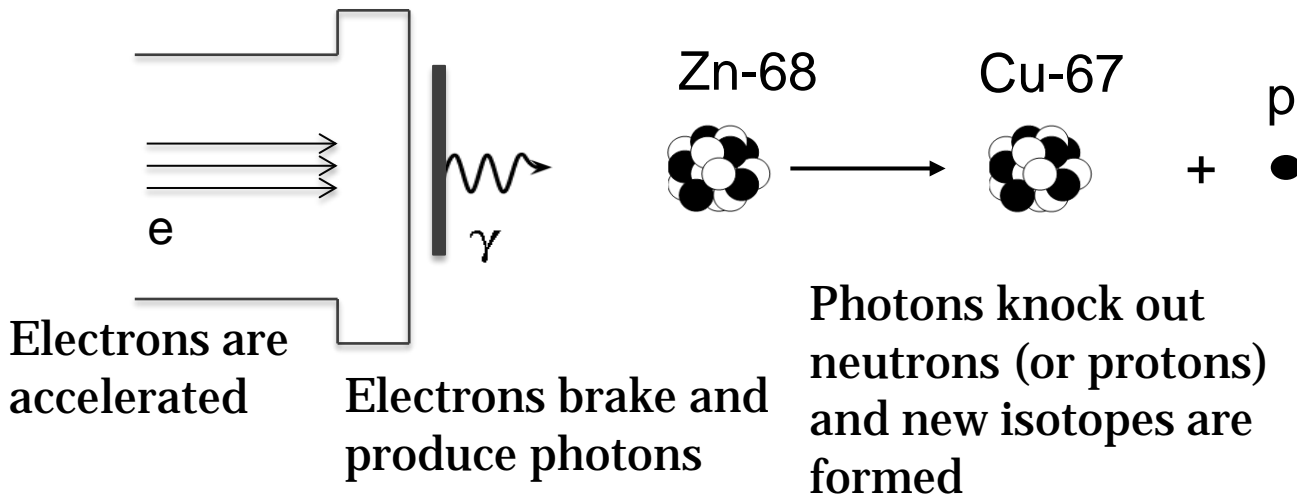

$$Y = N \int_{E_{th}}^{E_{max}} \phi(E) \cdot \sigma(E) dE$$

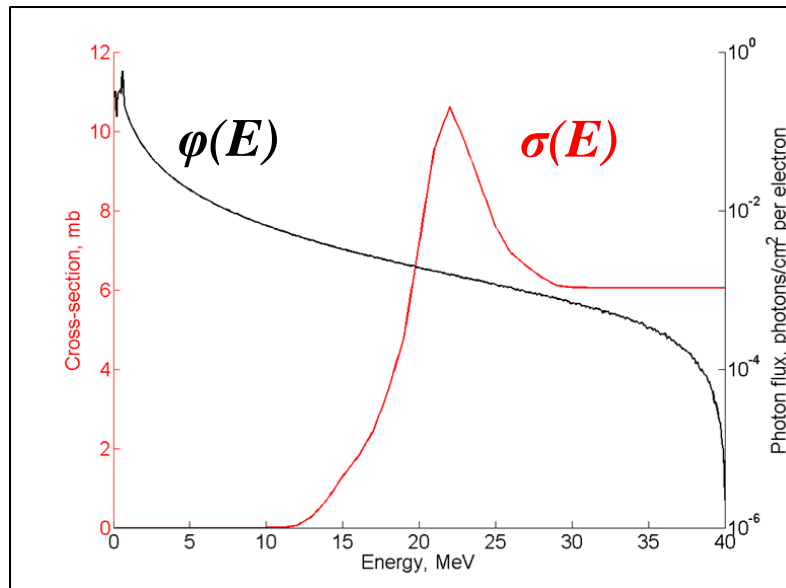




# Copper-67



- Cu-67 measured activity:  
 $16.0 \pm 0.4 \mu\text{Ci}/(\text{g}\cdot\text{kW}\cdot\text{h})$
- Predicted activity:  
 $20 \mu\text{Ci}/(\text{g}\cdot\text{kW}\cdot\text{h})$

*Scaled up activity: 0.2 Ci/g  
(using Zn-68, 100 kW beam  
and 24 h irradiation)*

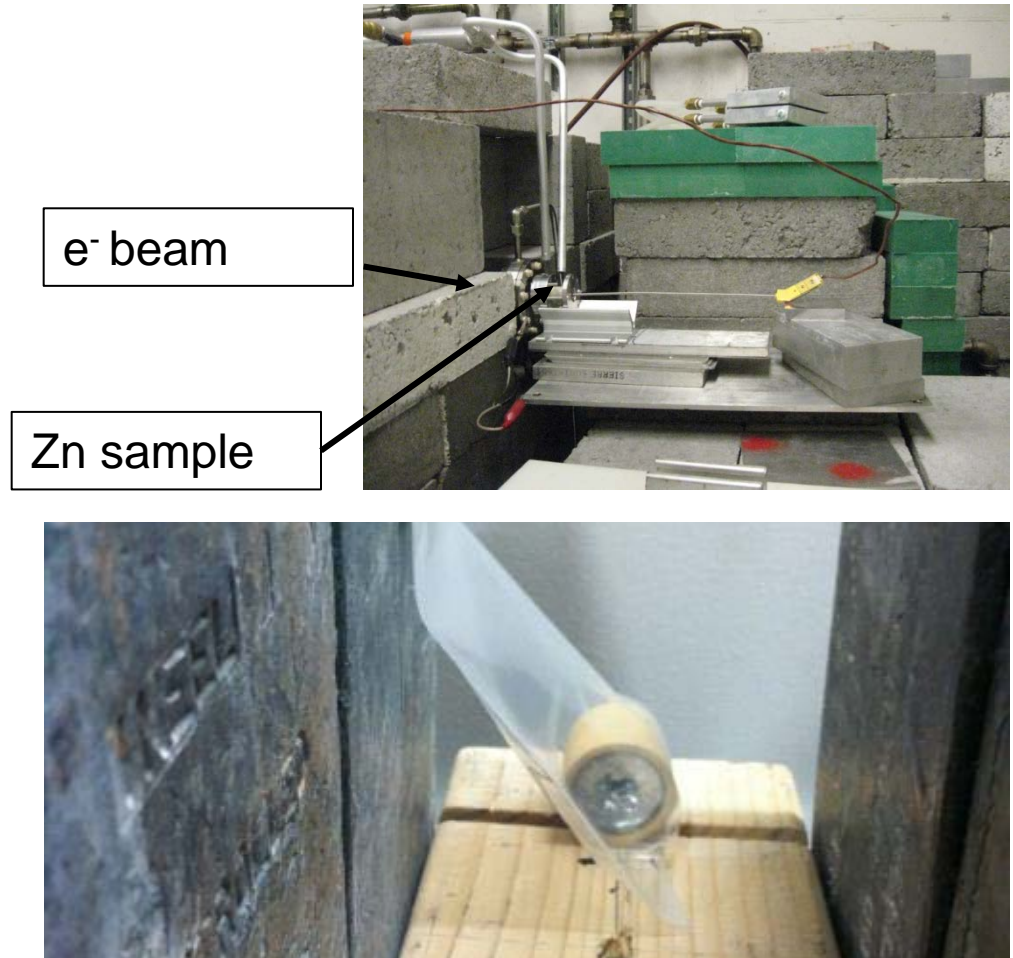







# Summary of Isotopes

	Target	Reaction	Half-life	Applications
<b>Photo-absorption</b>	$^{68}\text{Zn}$	$^{68}\text{Zn}(\gamma, p)^{67}\text{Cu}$	61 hours	Therapeutic beta and gamma emitter
	$^{225}\text{Ac}$	$^{226}\text{Ra}(\gamma, n)^{226}\text{Ra} \rightarrow ^{225}\text{Ac}$	10 days	Radioimmunotherapy alpha emitter for a number of cancers
	$^{89}\text{Y}$	$^{89}\text{Y}(\gamma, n)^{88}\text{Y}$	106 days	Tracer isotope in industry
	$^{48}\text{Ti}$	$^{48}\text{Ti}(\gamma, p)^{47}\text{Sc}$	3.4 days	Therapeutic/imaging applications
<b>Neutron Capture</b>	$^{31}\text{P}$	$^{31}\text{P}(n, \gamma)^{32}\text{P}$	14.3 days	High energy beta-emitter for research
	$^{45}\text{Sc}$	$^{45}\text{Sc}(n, \gamma)^{46}\text{Sc}$	84 days	Tracer isotope in research and industry
	$^{55}\text{Mn}$	$^{55}\text{Mn}(n, \gamma)^{56}\text{Mn}$	2.6 hours	Tracer isotope for research
	$^{74}\text{Se}$	$^{74}\text{Se}(n, \gamma)^{75}\text{Se}$	119 days	Source for NDT
	$^{89}\text{Y}$	$^{89}\text{Y}(n, \gamma)^{90}\text{Y}$	2.7 days	Tracer, beta-emitter for therapy
	$^{165}\text{Ho}$	$^{165}\text{Ho}(n, \gamma)^{166}\text{Ho}$	26.8 hours	Therapeutic applications
	$^{176}\text{Lu}$	$^{176}\text{Lu}(n, \gamma)^{177}\text{Lu}$	6.6 days	Therapeutic applications
	$^{191}\text{Ir}$	$^{191}\text{Ir}(n, \gamma)^{192}\text{Ir}$	74 days	Brachytherapy material; tracer isotope in industry
	$^{197}\text{Au}$	$^{197}\text{Au}(n, \gamma)^{198}\text{Au}$	2.7 days	Gamma emitter used for various cancer treatment; tracer isotope in research



# Molybdenum-99

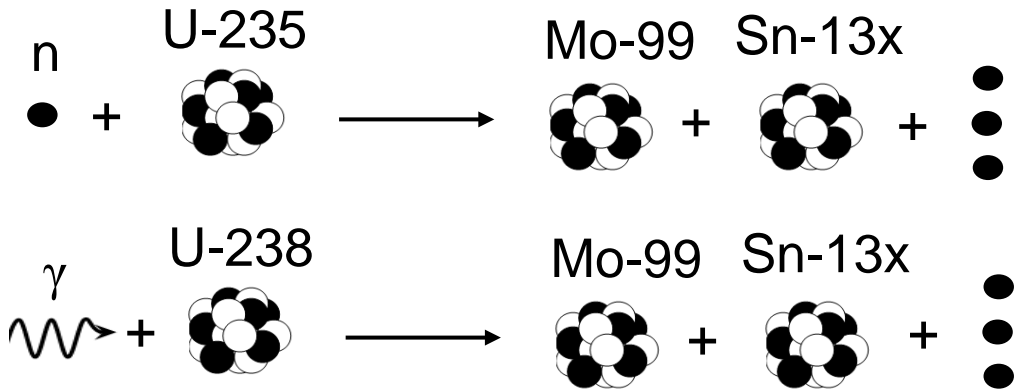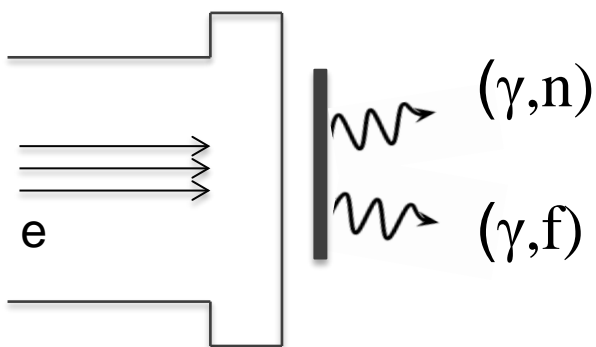

Electrons are accelerated

Electrons brake and produce photons


Photons:

- a) Induce photon-fission
- b) Liberate neutrons via fission and (γ,n) reactions and result in neutron-induced fission



# Mo-99 Production Rates

- Using LEU we plan to produce ~9 kCi of Mo-99 (~1,500 six-day curies) weekly at each of the 40 MeV 100 kW facilities
- 4-5 such facilities will satisfy North America's demand of Mo-99

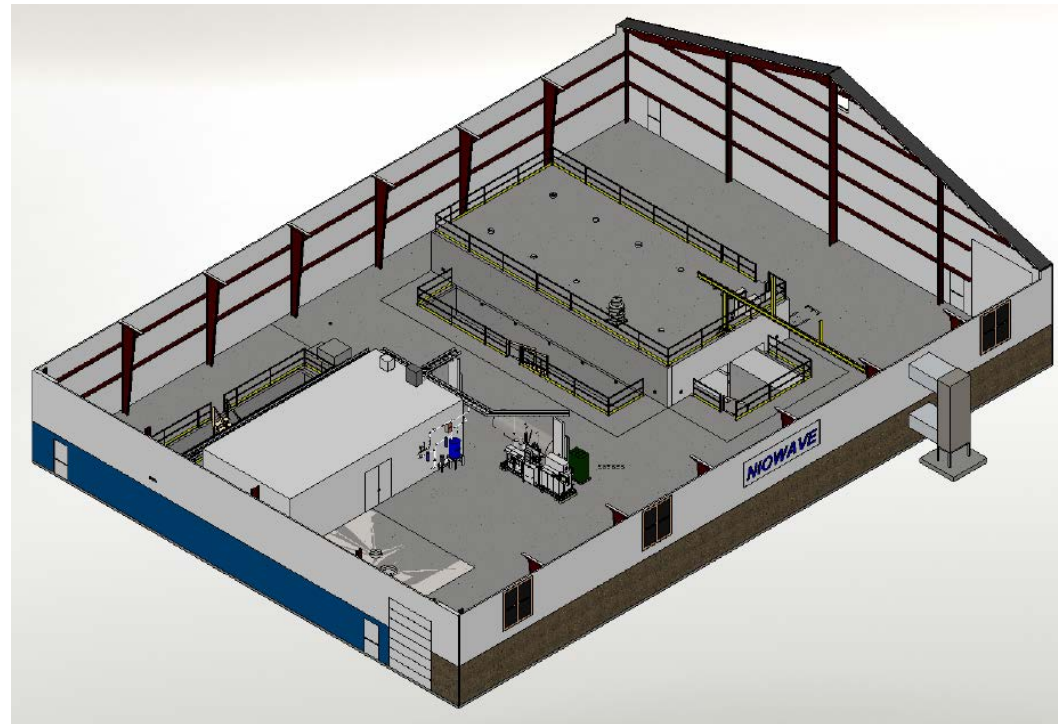



# Mo-99 Recovery

- Metal uranium production targets
- Molybdenum recovery
  - Uranium target dissolution with  $\text{HNO}_3$
  - Molybdenum adsorption on ion exchange resin
- Standard Tc-99m generators
  - Capable of using the existing supply chain
- Waste consolidated and shipped to LLW/HLW repositories




- State of Michigan
  - Licensed to operate 40 MeV, 100 kW linacs
    - License number PR-2013-0346
- Nuclear Regulatory Commission
  - Source Material License
    - Licensed to possess, machine, and distribute DU, <sup>nat</sup>U, <sup>232</sup>Th
    - License number 21-35145-01
  - Isotope Production Licenses
    - Research isotopes - submitted and under review
    - Mo-99 – submission pending additional assessment and discussion





- Plan to scale up production and processing as technical and financial milestones are met
- Phased approach to production and processing

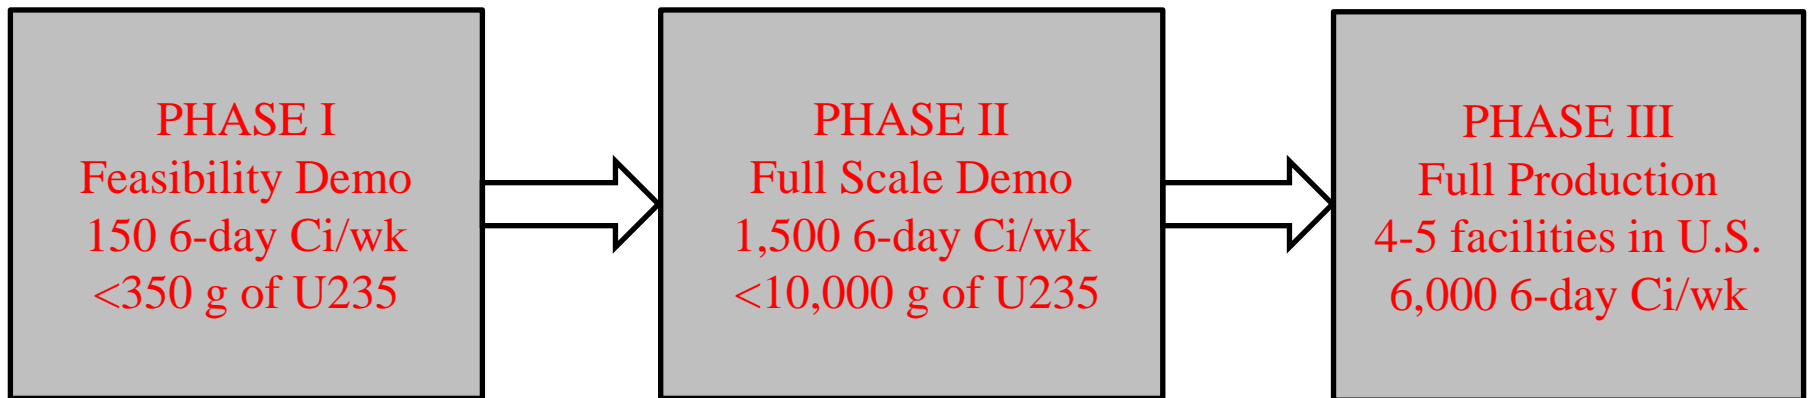



- Phase I – Feasibility Demo
  - Produce up to 900 Ci/wk (150 6-day Ci/wk)
  - Inventory of <1,750 g of 20% LEU (<350 g U235)
    - Part 150 Less than critical mass
  - Batch process <10 g of 20% LEU (<2 g U235)
    - Part 30 Byproduct from accelerators



- Phase II – Full Scale Demo
  - Produce up to 9,000 Ci/wk (1,500 6-day Ci/wk)
  - Inventory of <50,000 g of 20% LEU (<10,000 g U235)
    - Part 70 Cat 3 SNM of low strategic significance
  - Batch process <100 g of 20% LEU (<20 g U235)
    - Part 30 Byproduct from accelerators
  - Extract additional isotopes of commercial value
    - I131, Xe133, etc.



- Phase III – Full Production
  - Produce up to 36,000 Ci/wk (6,000 6-day Ci/wk)
  - 4 to 5 Production Facilities
    - Distributed around the U.S. to expedite distribution
    - Independently licensed under the same terms as the full scale demo
  - Distribute additional isotopes of commercial value
    - I131, Xe133, etc.



# Niowave Headquarters [1]

- Prototype and commission
  - 40 MeV superconducting electron linac
  - Isotope production target
- 2012 Dedication of testing facility
  - Keynote speakers: Senator Carl Levin, Senator Debbie Stabenow, Rear Admiral Matthew Klunder and MSU Provost Kim Wilcox







# Niowave Headquarters [2]

**NIOWAVE**  
www.niowaveinc.com

- Total 60,000 SF
  - Full in-house design, manufacturing, processing and testing capability
  - 3+ megawatts power
  - 60 kW RF power systems
  - Two 100 W helium refrigerators
  - Licensed to operate up to 40 MeV and 100 kW



A superconducting linac being installed in a Niowave testing tunnel



Interior of Niowave testing facility



# Niowave Airport Facility

**NIOWAVE**  
www.niowaveinc.com

- New manufacturing facility under construction
  - Beneficial occupancy in Nov 2014
  - Production & distribution of isotopes
    - 24/7 operation
  - Additional expansion space available





# Summary

- Niowave's photonuclear isotope facilities will be capable of supplying the entire Mo-99 requirements of North America
- First Mo-99 production (small scale)
  - Planned for Dec 2014
- Research isotopes supplied to DOE Isotope Program
  - Planned for Dec 2014